


DATASHEET

SMD B

19-22/Y2BHC-B04/2T



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mutil-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Description

- The 19-22 SMD LED is much smaller than lead frame type components, thus enable smaller board ize, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Copyright © 2010, Everlight All Rights Reserved. Release Date : Jan.26.2014 Issue No: DSE-0010860 Rev.2

www.everlight.com

LifecyclePhase: Approved Expired Period: Forever



Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

| Ch | ip | Emitted Color | Regin Color | |
|------|-----------|------------------|--------------|--|
| Туре | Materials | Emitted Color | Resin Color | |
| Y2 | AlGaInP | Brilliant Yellow | Water Clear | |
| ВН | InGaN | Blue | vvatei Cleai | |

Absolute Maximum Ratings (Ta=25)

| Parameter | Symbol | Rating | Unit |
|-----------------------------|------------------|-----------|------|
| Reverse Voltage | V_R | 5 | V |
| | | Y2:25 | |
| Forward Current | I _F | BH: 10 | mA |
| Peak Forward Current | | Y2:60 | |
| (Duty 1/10 @1KHz) | I _{FP} | BH: 100 | mA |
| Davis a Disability of the s | DJ | Y2:60 | |
| Power Dissipation | Pd | BH: 40 | mW |
| Operating Temperature | T _{opr} | -40 ~ +85 | |
| Storage Temperature | Tstg | -40 ~ +90 | |



| Electrostotic Discharge | FOD | Y2:2000 |
|-------------------------|--------------------|------------------------------------|
| Electrostatic Discharge | ESD _{HBM} | BH : 150 |
| Coldoring Tomporature | т | Reflow Soldering : 260 for 10 sec. |
| Soldering Temperature | I _{sol} | Hand Soldering: 350 for 3 sec. |

Electro-Optical Characteristics (Ta=25)

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Condition |
|------------------------------|-------------------|------|------|------|-------|----------------------|
| Luminaua Intanaitu | lv Y2 | 18.0 | | 45.0 | mod | |
| Luminous Intensity | ВН | 18.0 | | 45.0 | mcd | |
| Viewing Angle | 2θ _{1/2} | | 130 | | deg | |
| Danis Wassalan eth | p Y2 | | 591 | | nm | I _F =10mA |
| Peak Wavelength | ВН | | 468 | | 11111 | |
| Damin and Wassalan oth | d Y2 | | 589 | | nm | |
| Dominant Wavelength | ВН | | 470 | | nm | |
| Spectrum Radiation Bandwidth | Y2 | | 15 | | nm | |

| | | ВН | | 25 | | | |
|-----------------|---------|----|------|------|------|----|--------------------|
| E 137.11 | V_{F} | Y2 | 1.70 | 2.00 | 2.40 | V | |
| Forward Voltage | | ВН | 2.70 | 3.30 | 3.70 | V | |
| Dovorgo Current | I_R | Y2 | | | 10 | пΛ | V _R =5V |
| Reverse Current | | BH | | | 50 | μΑ | v _R -5v |

Note:

Tolerance of Luminous Intensity: ±11%



Y2 Bin Range of Luminous Intensity

| M 18.0 28.5 mcd I _F =10mA | Bin Code | Min. | Max. | Unit | Condition |
|---|----------|------|------|------|----------------------|
| $\overline{}$ mcd $\overline{}$ $\overline{}$ $\overline{}$ $\overline{}$ | M | 18.0 | 28.5 | | 1 40mA |
| N 28.5 45.0 | N | 28.5 | 45.0 | mcd | I _F =10MA |



BH
Bin Range of Luminous Intensity

| Bin Code | Min. | Max. | Unit | Condition |
|----------|------|------|------|----------------------|
| М | 18.0 | 28.5 | | L 40 A |
| N | 28.5 | 45.0 | mcd | I _F =10mA |

Note:


Tolerance of Luminous Intensity: ±11%








Typical Electro-Optical Characteristics Curves Y2




















Expired Period: Forever


Typical Electro-Optical Characteristics Curves BH


R

















Expired Period: Forever

Package Dimension

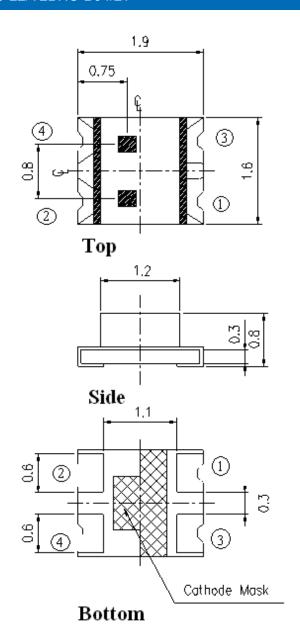



Recommend Soldering Pad



Expired Period: Forever

Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm



Moisture Resistant Packing Materials

Label Explanation




- · CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- · CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength

Rank


- REF: Forward Voltage Rank
- · LOT No: Lot Number

Reel Dimensions

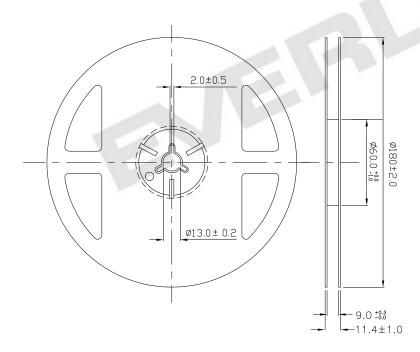


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

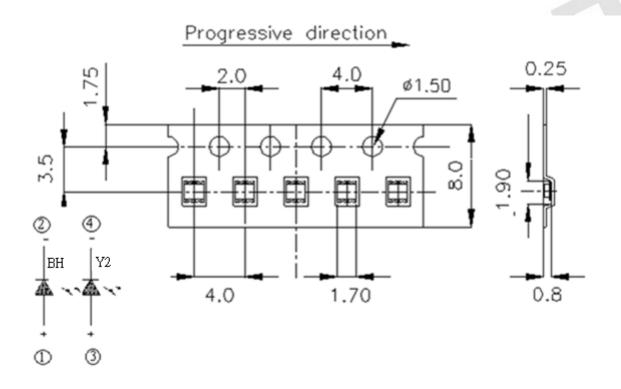

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

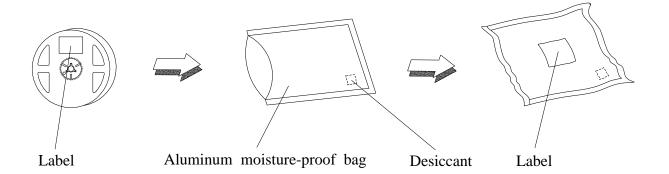

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 After opening the package: The LEDs should be kept at 30 or less and 60%RH or less.
- 2.3 The LED's should be used within 168 hours(7 days) after opening the package If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5 for 24 hours.

- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

12

Expired Period: Forever

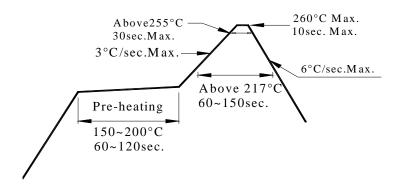


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.



Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

13

Expired Period: Forever