

SB320 thru SB3100

Schottky Barrier Rectifiers

Reverse Voltage 20 to 100V Forward Current 3.0A

Feature & Dimensions

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- * Guarding for over voltage protection
- * High temperature soldering guaranteed: 260°C/10 seconds at terminals

Mechanical Data

Case: JEDEC DO-201AD, molded plastic over glass DIE


Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.038oz., 1.03 g

Handling precaution: None

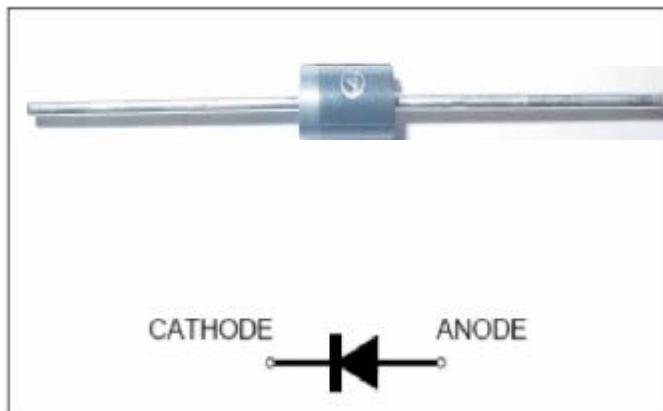

We declare that the material of product compliance with ROHS requirements

1. Maximum & Thermal Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	Unit
device marking code		SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	V
Maximum RSM voltage	V _{RSM}	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	I _{F(AV)}	3.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80								A
Typical thermal resistance (Note 1)	R _{θJA}	50								°C/W
Operating temperature range	T _J	-55 to +150								°C
storage temperature range	T _{STG}	-55 to +150								°C

Electrical Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	SB320	SB330	SB340	SB350	SB360	SB380	SB390	SB3100	Unit
Maximum instantaneous forward voltage at 3.0A	V _F	0.50		0.70		0.85				V
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TA = 100°C	I _R	0.5		30						mA
Typical junction capacitance at 4.0V, 1MHz	C _J	160								PF

NOTES:

- Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

SB320 thru SB3100

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

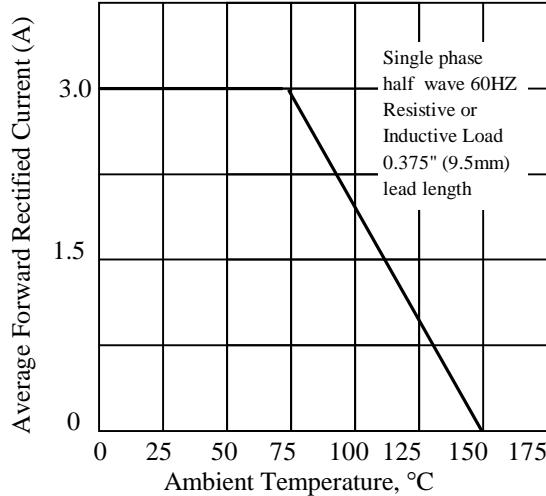


Fig 3. - Typical Instantaneous Forward Characteristics

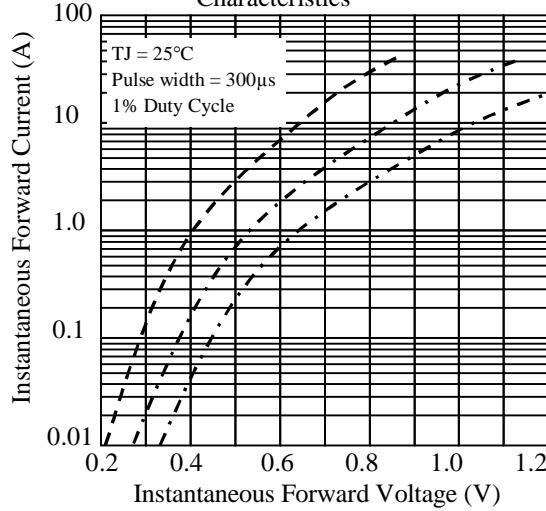


Fig 5. - typical transient thermal impedance

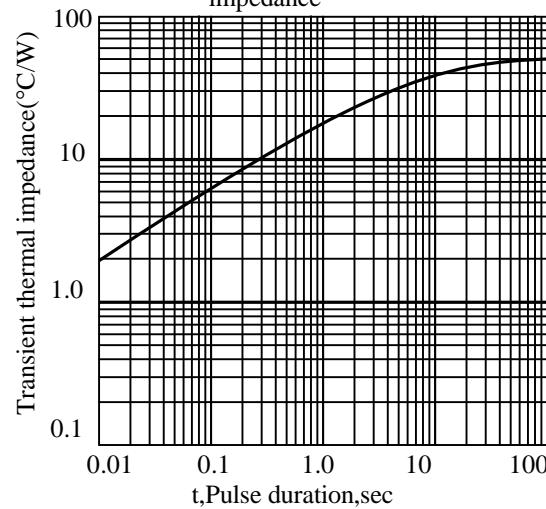


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

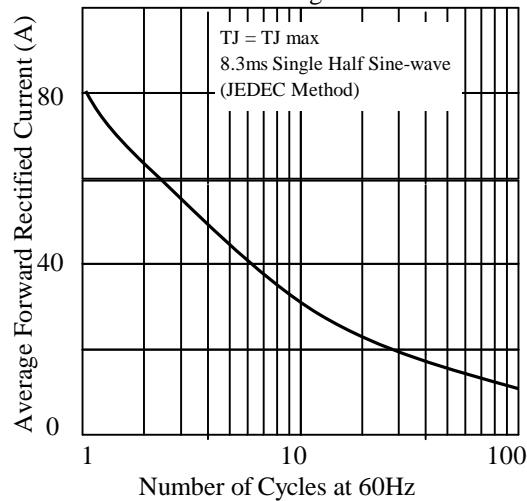


Fig 4. - Typical Reverse Characteristics


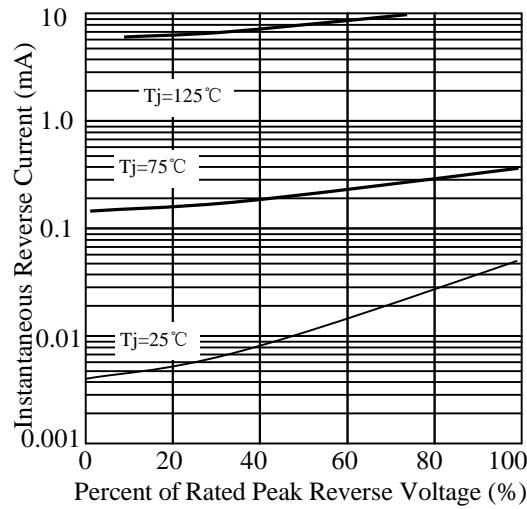



Fig 6. - Typical Junction Capacitance

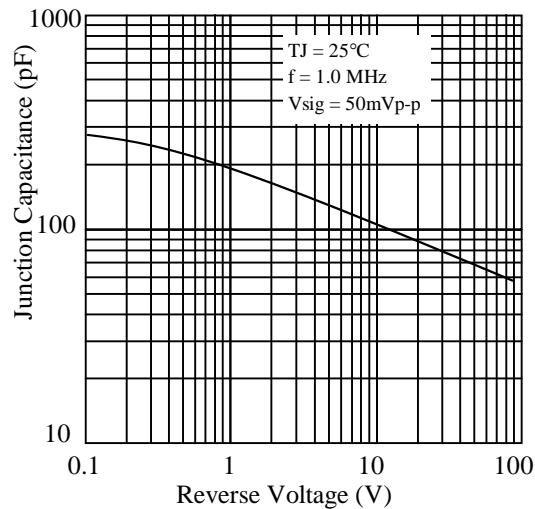

SB320 thru SB3100

3. dimension:

Package outline

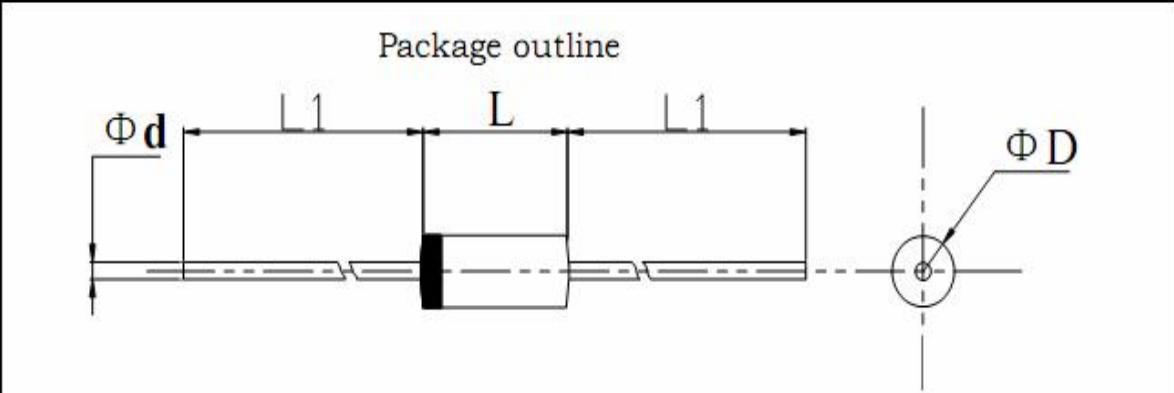

Dimensions					Note: DO-201AD molded plastic case The marking band indicates the cathode
	inches		mm		
	Min.	Max.	Min.	Max.	
L	0.335	0.375	8.5	9.5	
L1	1.0	-	25.4	-	
ΦD	0.197	0.220	5.0	5.6	
Φd	0.048	0.052	1.2	1.3	

SB320 thru SB3100

4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2010-9-26
2	增加包装规范和修正结温为150度。	周杰	2012.02.07