


S-EFM106

Surface Mount Glass Passivated Super Fast Rectifiers

Reverse Voltage 400V Forward Current 1.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High temperature metallurgically bonded construction
- * For use in high frequency rectifier circuits
- * Fast switching for high efficiency
- * Cavity-free glass passivated junction
- * Capable of meeting environmental standards of MIL-S-19500
- * 1.0 A operation at TL=100°C with no thermal runaway
- * Typical IR less than 1.0µA
- * High temperature soldering guaranteed: 260°C/10 seconds
- * S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

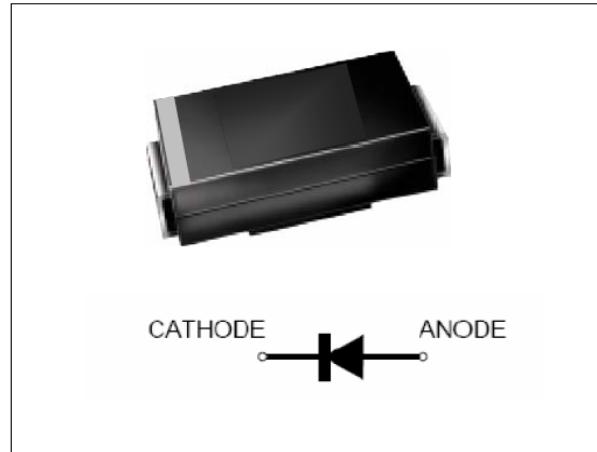

We declare that the material of product compliance with ROHS requirements

2. Mechanical Data

Case: JEDEC DO-214AC, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0023 oz., 0.065 g

Handling precaution: None

3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
S-EFM106	EF6	5000/Tape&Reel

4. Electrical Characteristic

Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	S-EFM106	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	400	V
Maximum RMS voltage	V _{RMS}	280	V
Maximum DC blocking voltage	V _{DC}	400	V
Maximum average forward rectified current at TL = 100°C	I _{F(AV)}	1.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30	A
Typical thermal resistance (Note 2)	R _{θJA}	150	°C/W
Operating junction and storage temperature range	T _J , T _{TSG}	-50 to +150	°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	S-EFM106	Unit
Maximum instantaneous forward voltage at 1.0A	V _F	1.25	V
Maximum DC reverse current TA = 25°C at rated DC blocking voltage TJ = 125°C	I _R	5.0 100	µA
Typical reverse recovery time (Note 1)	t _{rr}	35	ns
Typical junction capacitance at 4.0V, 1MHz	C _J	8.0	PF

NOTES:

1. IF = 0.5A, IR = 1.0A, I_{RR} = 0.25A

2. 8.0mm² (.013mm thick) lead areas

3. VF & TRR & VDC & IR all test; other parameter is scheme out.

S-EFM106

5.Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

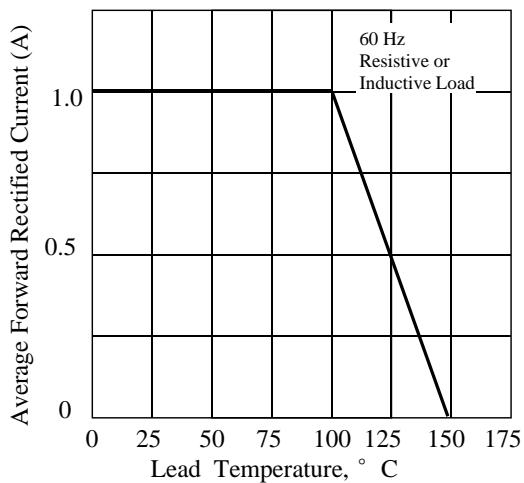


Fig 3. - Typical Instantaneous Forward Characteristics

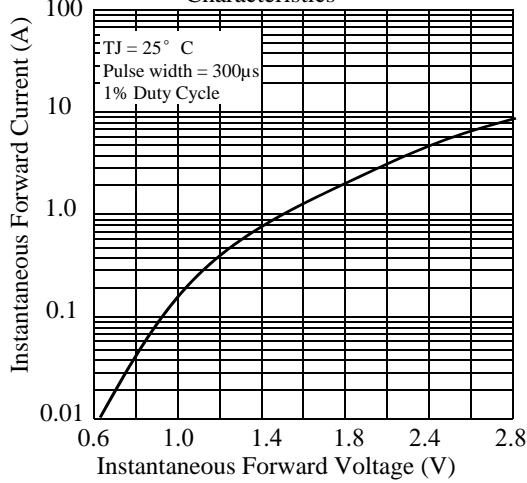


Fig 5. - typical transient thermal impedance

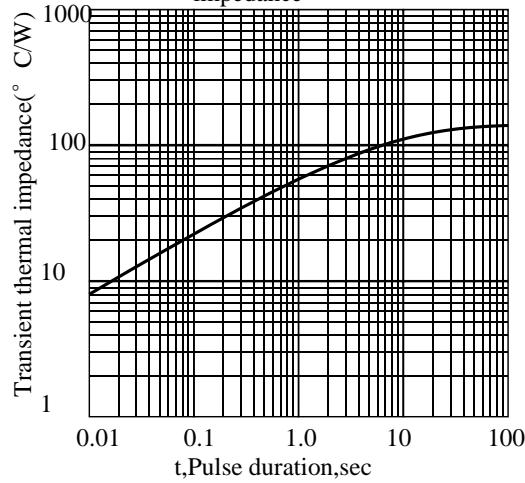


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

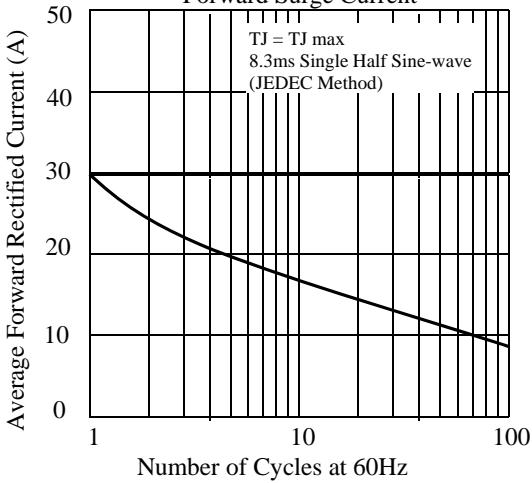


Fig 4. - Typical Reverse Characteristics


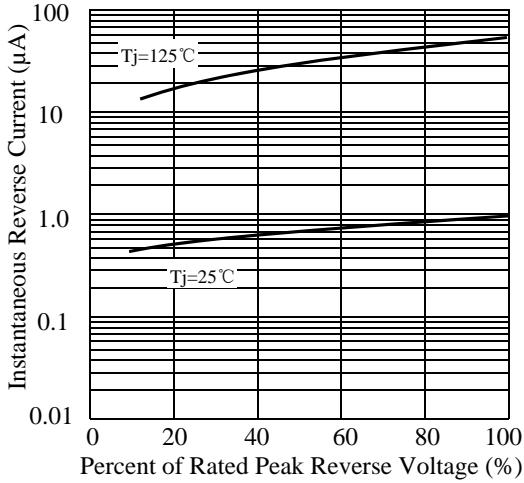



Fig 6. - Typical Junction Capacitance

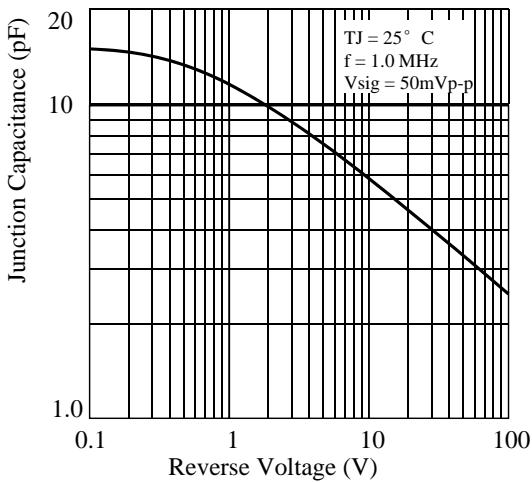

S-EFM106

6. dimension:

Package outline

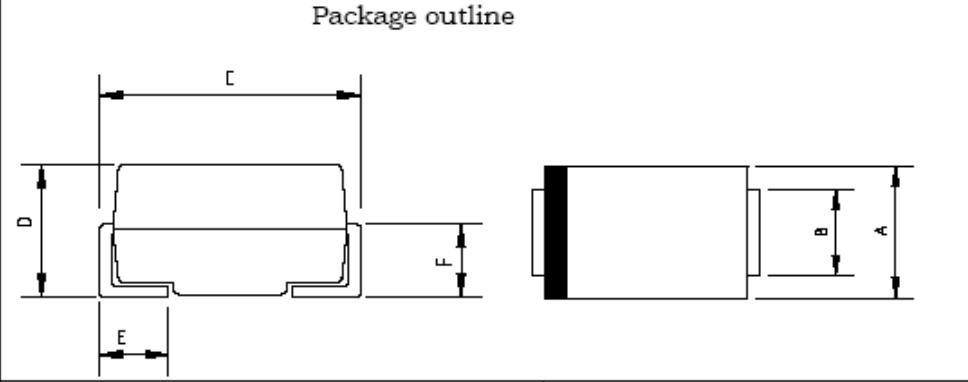

Dimensions				Note: DO-214AC molded plastic case The marking band indicates the cathode
	inches	mm		
	Min.	Max.	Min.	Max.
A	0.086	0.110	2.2	2.8
B	0.051	0.067	1.3	1.7
C	0.185	0.209	4.7	5.3
D	0.067	0.100	1.7	2.55
E	0.035	0.059	0.9	1.5
F	0.035	0.059	0.9	1.5

