


S-FFMAF201 thru S-FFMAF207T

Surface Mount Glass Passivated Junction Fast Recovery Rectifiers

Reverse Voltage 50 to 1000V Forward Current 2.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High temperature metallurgically bonded construction
- * Cavity-free glass passivated junction
- * Capable of meeting environmental standards of MIL-S-19500
- * Typical IR less than 1.0 μ A
- * High temperature soldering guaranteed: 260°C/10 seconds
- * S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- * We declare that the material of product compliance with RoHS requirements and Halogen Free.

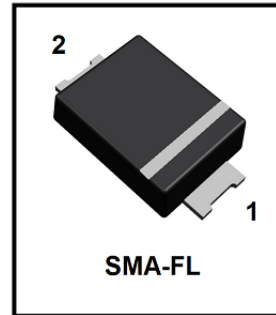

Mechanical Data

Case: JEDEC SMA-FL, molded plastic over glass DIE

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position Any

Weight: 28mg

Handling precaution: None

Electrical Characteristic

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter Symbol | symbol | S-FFMAF201 | S-FFMAF202 | S-FFMAF203 | S-FFMAF204 | S-FFMAF205 | S-FFMAF206 | S-FFMAF207 | S-FFMAF207P | S-FFMAF207T | Unit | |
|--|------------------------------------|-------------|------------|------------|------------|------------|------------|------------|-------------|-------------|------------------|--------------------|
| Device marking code | | FF21 | FF22 | FF23 | FF24 | FF25 | FF26 | FF27 | FF27P | FF27T | | |
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1000 | 1000 | V | |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | 700 | 700 | V | |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1000 | 1000 | V | |
| Maximum average forward rectified current lead length at $T_C = 75^\circ\text{C}$ (Note 2) | $I_{F(AV)}$ | 2.0 | | | | | | | | | A | |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 60 | | | | | | | | | A | |
| Typical reverse recovery time (Note 1) | t_{rr} | 150 | | | 250 | 500 | 250 | 160 | | | ns | |
| Typical thermal resistance (Note 2) | $R_{\theta JA}$ $R_{\theta JL}$ | 150 | | | | | 35 | | | | | $^\circ\text{C/W}$ |
| Operating junction temperature range | T_J | -55 to +150 | | | | | | | | | $^\circ\text{C}$ | |
| storage temperature range | T_{STG} | -55 to +150 | | | | | | | | | $^\circ\text{C}$ | |

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter Symbol | symbol | S-FFMAF201 | S-FFMAF202 | S-FFMAF203 | S-FFMAF204 | S-FFMAF205 | S-FFMAF206 | S-FFMAF207 | S-FFMAF207P | S-FFMAF207T | Unit | |
|--|--------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|------|---------------|
| Maximum instantaneous forward voltage at 2.0A | V_F | 1.3 | | | | | | | | | V | |
| Maximum DC reverse current $T_J = 25^\circ\text{C}$ at rated DC blocking voltage $T_J = 125^\circ\text{C}$ | I_R | 5.0 | | | | | 100 | | | | | μA |
| Typical junction capacitance at 4.0V, 1MHz (Note 2) | C_J | 15.0 | | | | | | | | | PF | |

NOTES:

1. $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $IRR = 0.25\text{A}$
2. 8.0mm^2 (.013mm thick) land areas

S-FFMAF201 thru S-FFMAF207T

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

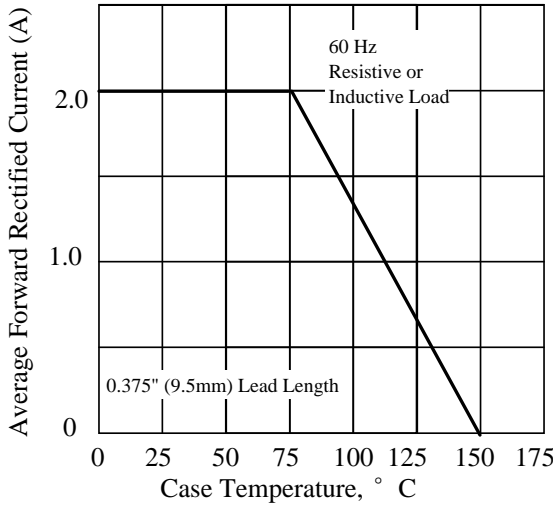


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

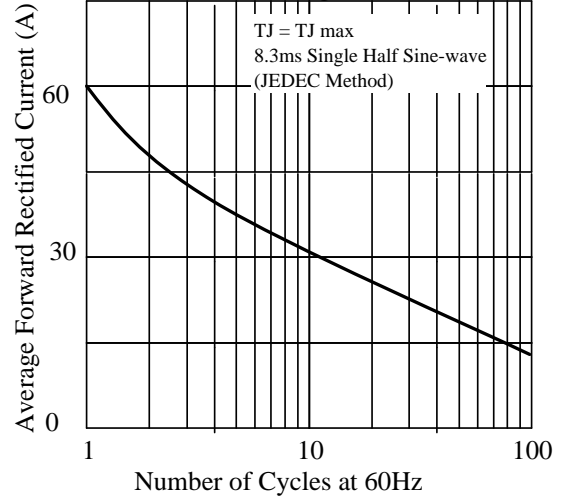


Fig 3. - Typical Instantaneous Forward Characteristics

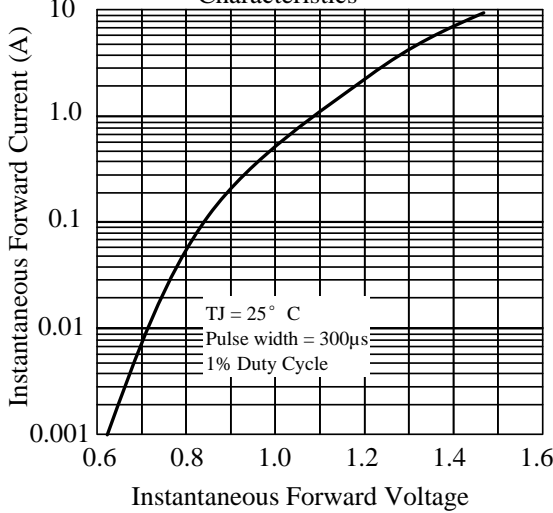


Fig 4. - Typical Reverse Characteristics

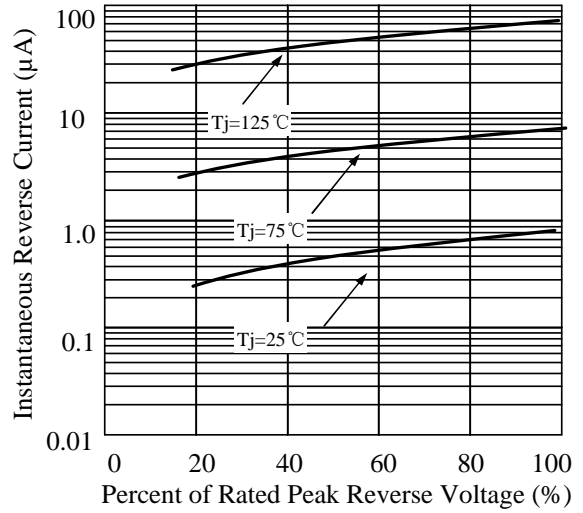


Fig 5. - typical transient thermal impedance



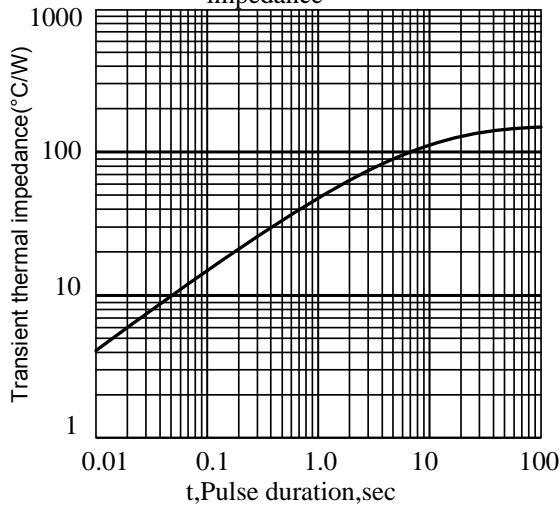


Fig 6. - Typical Junction Capacitance

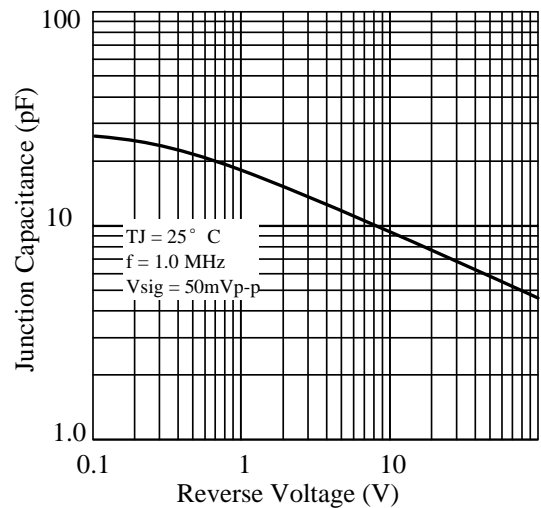

3.OUTLINE AND DIMENSIONS

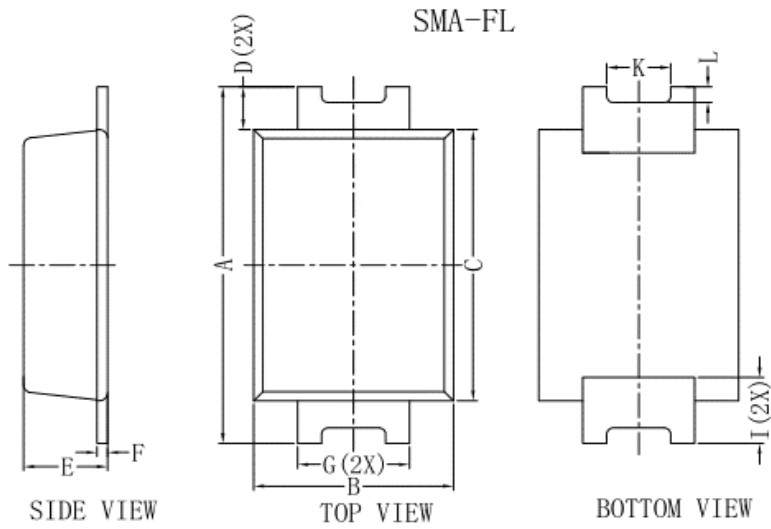


| SMA-FL | | | |
|--------|------|------|------|
| DIM | MIN | MAX | Typ. |
| A | 4.40 | 4.80 | 4.60 |
| B | 2.30 | 2.70 | 2.60 |
| C | 3.30 | 3.70 | 3.50 |
| D | | | 0.55 |
| E | 0.90 | 1.20 | 1.05 |
| F | 0.11 | 0.21 | 0.17 |
| G | 1.30 | 1.50 | 1.40 |
| I | - | - | 0.90 |
| K | - | - | 0.80 |
| L | - | - | 0.20 |

All Dimensions in mm

GENERAL NOTES

- 1.Top package surface finish Ra0.4±0.2um
- 2.Bottom package surface finish Ra0.7±0.2um

4.SOLDERING FOOTPRINT

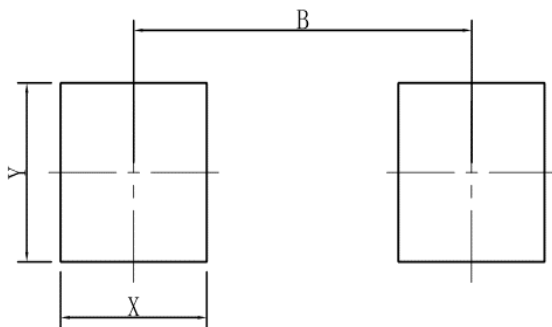

| SMA-FL | |
|--------|------|
| DIM | (mm) |
| X | 1.60 |
| Y | 1.80 |
| B | 3.70 |



Proprietary Information

Title: Power Packages Product Packing Specification

功率产品包装规范

Document Number: APS-QA-QS-009

Revision C

Page 3 of 6



8.1.2 Label position and QA stamp position.(Empty area) 标签张贴位置及QA印章位置。(印章盖在标签空白区)




7英寸卷盘标签张贴及QA印章位置



13英寸卷盘标签张贴及QA印章位置

8.1.3 Ensure direction In the same reel. The same steel coil plate direction, With antistatic bubble to package reel. Refer to the below picture.
同一箱内的卷盘方向一致,用防静电泡沫对卷盘进行包裹。

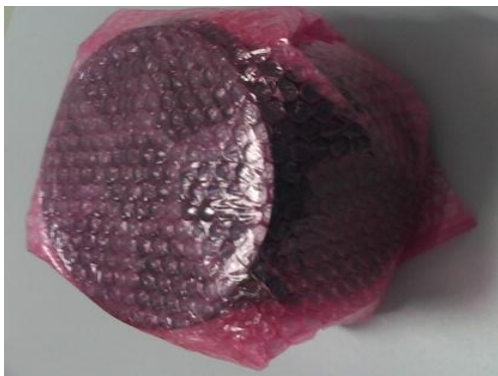

7英寸卷盘防静电泡沫包裹



13英寸卷盘防静电泡沫包裹



Proprietary Information

Title: Power Packages Product Packing Specification

功率产品包装规范

Document Number: APS-QA-QS-009

Revision C

Page 4 of 6

8.1.4 Put in the antistatic packing box after packaged reels. And QA stamp on the box label .

将包装好的卷盘放入防静电纸箱中，并在盒标签上盖章。



7 英寸卷盘内盒及标签



13 英寸卷盘内盒及标签

8.1.5 Product use printing inner box. 产品使用LRC印字内箱。



7英寸卷盘内箱印字（侧面）



13英寸卷盘内箱印字（正面）

8.1.6 Inner box packing quantity requirement. 内盒包装数量要求。

| Product Description | QTY |
|---------------------|-----------|
| SOD123-FL | 1-10Reels |
| SOD323-HE | 1-10Reels |
| SMA-FL | 1-7Reels |
| SMB-FL | 1-4Reels |

8.1.7 With transparent tape sealing. 透明胶带封箱。



Proprietary Information

Title: Power Packages Product Packing Specification 功率产品包装规范

Document Number: APS-QA-QS-009

Revision C

Page 5 of 6



7英寸内箱封盒



13英寸内箱封盒

8.1.8 Outer box size and packing quantity requirement, 外箱尺寸及包装数量要求。

| Product Description | 卷盘尺寸 | Height (H) | Width (W) | Length (L) | Max. Qty |
|---------------------|-------|------------|-----------|------------|----------|
| Power Device | 7 英寸 | 410mm | 400mm | 445mm | 12 |
| Power Device | 13 英寸 | 410mm | 400mm | 445mm | 5 |



7 英寸卷盘产品装箱



13 英寸卷盘产品装箱

统一方向



Proprietary Information

Title: Power Packages Marking & Taping Specification

功率封装字模和编带规范

Document Number: APS-QA-QS-010

Revision C

Page 6 of 9

8.2 Standard Products Taping Specification

标准产品编带规范


8.2.1 Tape length of no component

空带长度说明

Taping leader length 引导部分: 440mm±40mm , Tape trailer 尾部: 200mm±40mm

Figure 4

Tape Ends For Finished Goods Reel

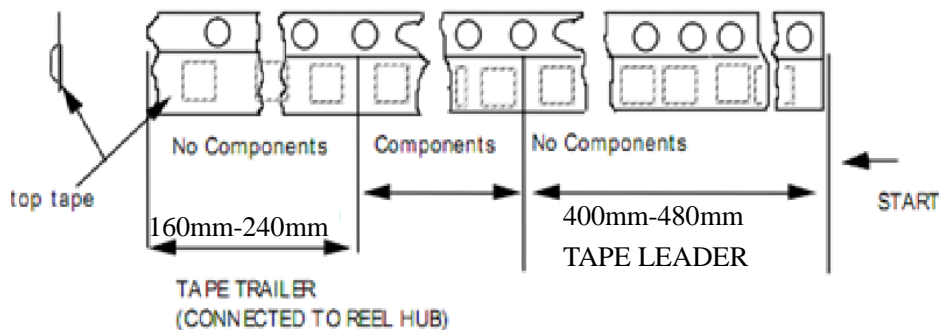

8.2.2 Component packaging orientation: The cathode lead is close to the carrier tape's index hole.

产品放置方向: 印阴极带引脚邻近载带索引孔





Proprietary Information

Title: Power Packages Marking & Taping Specification

功率封装字模和编带规范

Document Number:APS-QA-QS-010

Revision C

Page 7 of 9

8.2.3 Tape enwind orientation

编带缠绕方向要求

