


Zener Diode in SOD-323

Features

- Low Zener Impedance
- 200mW Power Dissipation
- High Stability and High Reliability

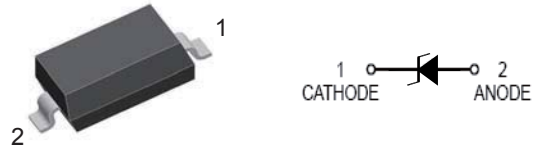

Mechanical Data

- **Case:** SOD-323 (plastic package).
Lead free; RoHS compliant
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward Voltage (Note 2) @ $I_F = 10\text{mA}$	V_F	0.9	V
Power Dissipation(Note 1)	P_d	200	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	°C/W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~+150	°C

- 1) Device mounted on ceramic PCB: 7.6mm x 9.4mm x 0.87mm with pad areas 25mm²
- 2) Short duration test pulse used to minimize self-heating effect
- 3) f=1KHz





Electrical Characteristics

($T_A = 25\text{ °C}$ unless otherwise specified)


Type	Zener Voltage Range ¹⁾			Dynamic Impedance				Reverse Leakage Current	
	V_{znom}	V_{ZT}	at I_{ZT}	Z_{ZT}	at I_{ZT}	Z_{ZK}	at I_{ZK}	I_R	at V_R
	V	V	mA	Max. (Ω)	mA	Max. (Ω)	mA	Max. (μA)	V
BZT52C2V4S	2.4	2.2...2.6	5	100	5	600	1	50	1
BZT52C2V7S	2.7	2.5...2.9	5	100	5	600	1	20	1
BZT52C3V0S	3.0	2.8...3.2	5	95	5	600	1	10	1
BZT52C3V3S	3.3	3.1...3.5	5	95	5	600	1	5	1
BZT52C3V6S	3.6	3.4...3.8	5	90	5	600	1	5	1
BZT52C3V9S	3.9	3.7...4.1	5	90	5	600	1	3	1
BZT52C4V3S	4.3	4...4.6	5	90	5	600	1	3	1
BZT52C4V7S	4.7	4.4...5	5	80	5	500	1	3	2
BZT52C5V1S	5.1	4.8...5.4	5	60	5	480	1	2	2
BZT52C5V6S	5.6	5.2...6	5	40	5	400	1	1	2
BZT52C6V2S	6.2	5.8...6.6	5	10	5	150	1	3	4
BZT52C6V8S	6.8	6.4...7.2	5	15	5	80	1	2	4
BZT52C7V5S	7.5	7...7.9	5	15	5	80	1	1	5
BZT52C8V2S	8.2	7.7...8.7	5	15	5	80	1	0.7	5
BZT52C9V1S	9.1	8.5...9.6	5	15	5	100	1	0.5	6
BZT52C10S	10	9.4...10.6	5	20	5	150	1	0.2	7
BZT52C11S	11	10.4...11.6	5	20	5	150	1	0.1	8
BZT52C12S	12	11.4...12.7	5	25	5	150	1	0.1	8
BZT52C13S	13	12.4...14.1	5	30	5	170	1	0.1	8
BZT52C15S	15	13.8...15.6	5	30	5	200	1	0.1	10.5
BZT52C16S	16	15.3...17.1	5	40	5	200	1	0.1	11.2
BZT52C18S	18	16.8...19.1	5	45	5	225	1	0.1	12.6
BZT52C20S	20	18.8...21.2	5	55	5	225	1	0.1	14
BZT52C22S	22	20.8...23.3	5	55	5	250	1	0.1	15.4
BZT52C24S	24	22.8...25.6	5	70	5	250	1	0.1	16.8
BZT52C27S	27	25.1...28.9	2	80	2	300	0.5	0.1	18.9
BZT52C30S	30	28...32	2	80	2	300	0.5	0.1	21
BZT52C33S	33	31...35	2	80	2	325	0.5	0.1	23.1
BZT52C36S	36	34...38	2	90	2	350	0.5	0.1	25.2
BZT52C39S	39	37...41	2	130	2	350	0.5	0.1	27.3
BZT52C43S	43	40...46	2.5	130	2	500	1	2	33
BZT52C47S	47	44...50	2.5	150	2	500	1	2	36
BZT52C51S	51	48...54	2.5	180	2	500	1	1	39
BZT52C56S	56	52...60	2.5	180	2	500	1	1	43
BZT52C62S	62	58...66	2.5	200	2	500	1	0.2	47
BZT52C68S	68	64...72	2.5	250	2	500	1	0.2	52
BZT52C75S	75	70...79	2.5	300	2	500	1	0.2	57

¹⁾ V_{ZT} is tested with pulses (20 ms).

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

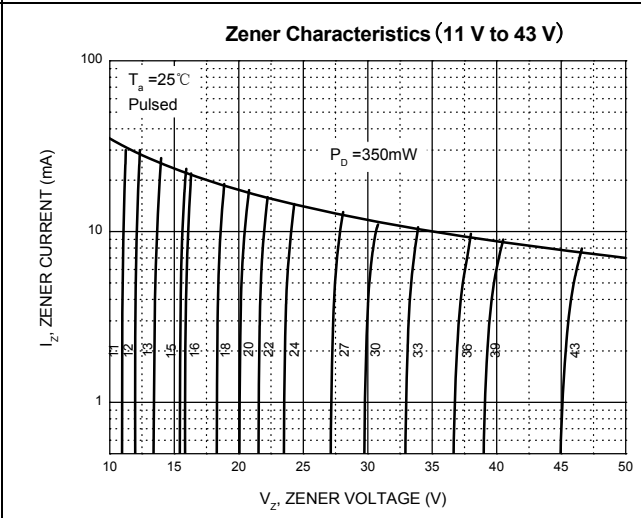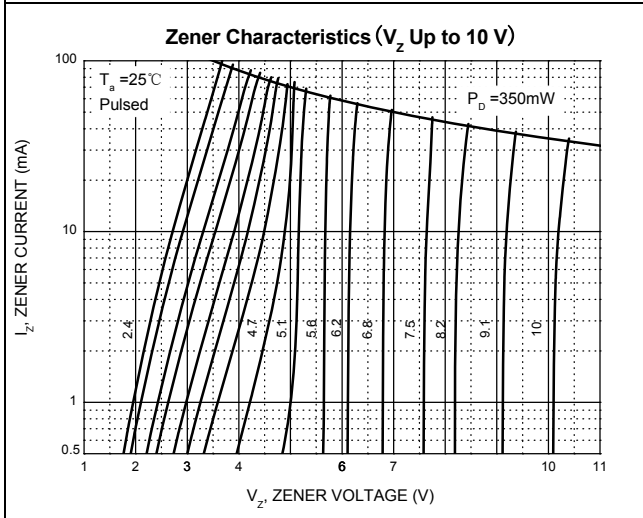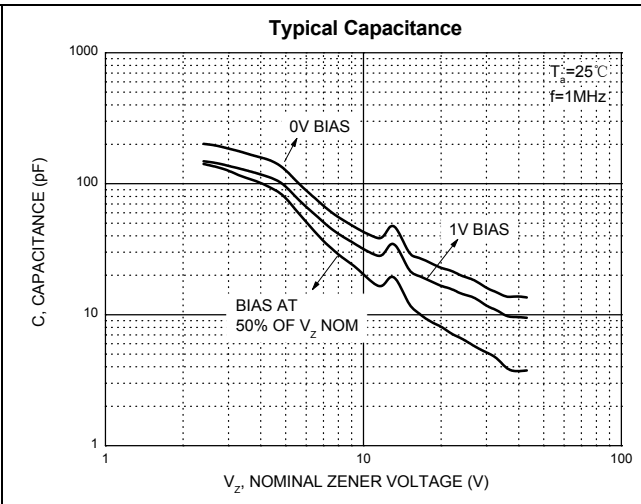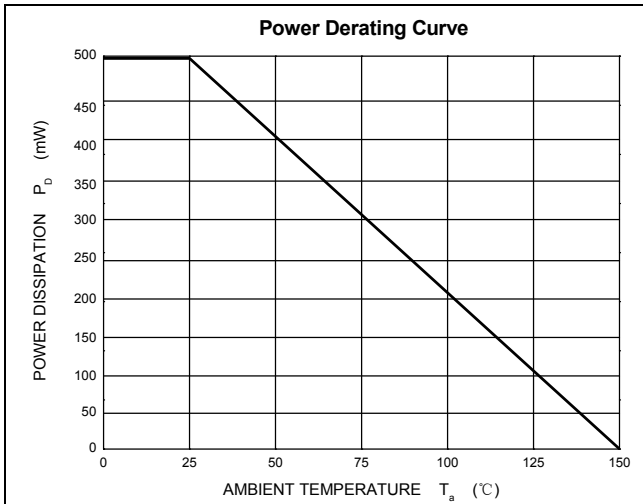

Package Dimensions

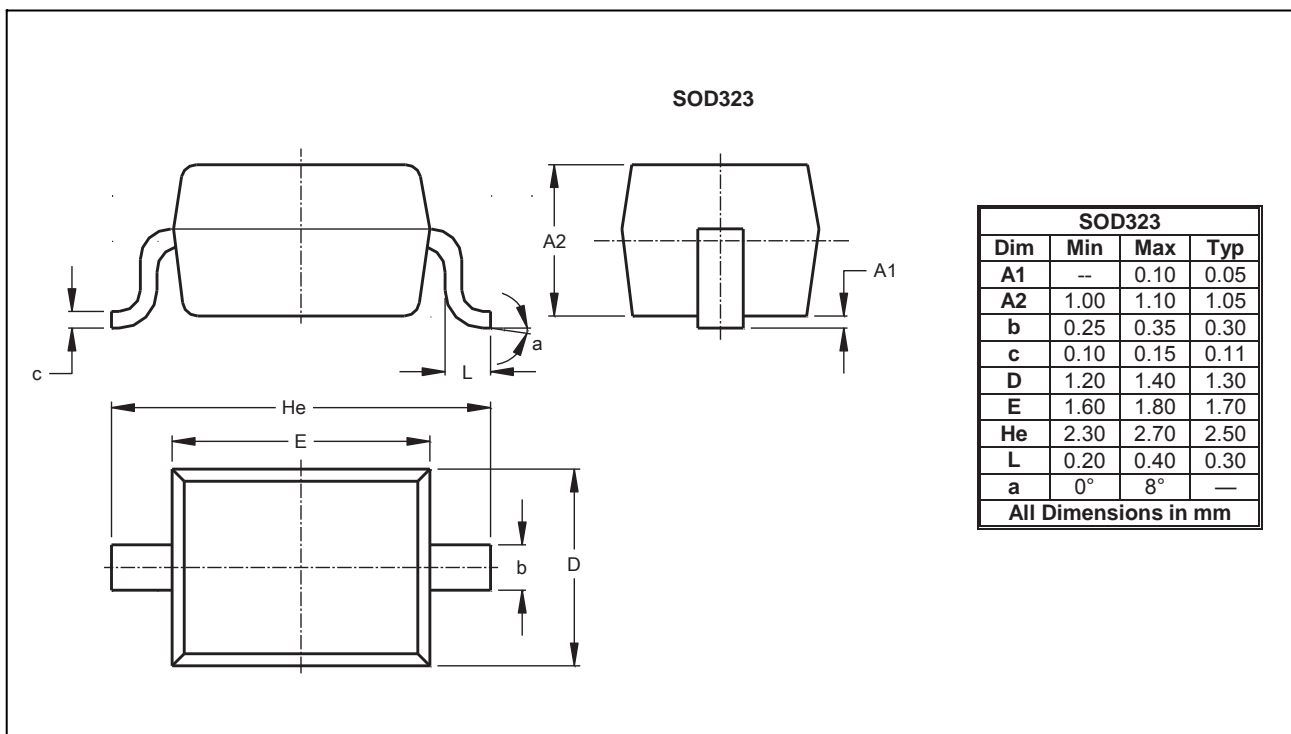

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
BZT52CxxS	SOD-323	Tape and reel	3000pcs / reel	EIA STD RS-481

Revision history

Date	Revision	Changes
23-May-2012	1.0	Initial release

CAUTION / WARNING

Information in this document is believed to be accurate and reliable. However, CREATEK does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Users should independently evaluate the suitability of and test each product selected for their own applications, and CREATEK assumes no liability whatsoever relating to the choice, selection or use of the CREATEK products and services described herein.

CREATEK reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an CREATEK product can reasonably be expected to result in personal injury, death or severe property or environmental damage. CREATEK accepts no liability for inclusion and/or use of CREATEK products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.


This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Resale of CREATEK products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by CREATEK for the CREATEK product or service described herein and shall not create or extend in any manner whatsoever, any liability of CREATEK.

CREATEK expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. CREATEK only obligations are those in the CREATEK Standard Terms and Conditions of Sale and in no case will CREATEK be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2009, CREATEK Microelectronics

 CREATEK® is a registered trademark of CREATEK Microelectronics

All rights reserved