

# HSF

**NOTES:**



Rated Current:1.0AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0


## Ordering Information

**5226 - XX YP XX B W 01**






Two Parts Conn+Cover	No. of Pins 10P-50P	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni	Color Insulator B=Black G=Grey(427C)
-------------------------	------------------------	---	--

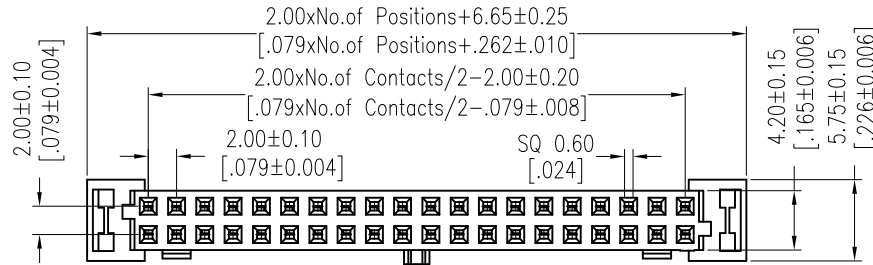

SINGLE RAMP LOCKING ONLY  
 (APPLICABLE FOR 10 TO 12 CKT)



POLARIZATION AND RAMP LOCKING  
 (APPLICABLE FOR 14 TO 50 CKT)

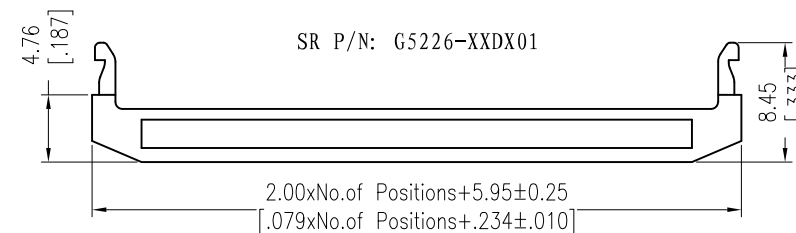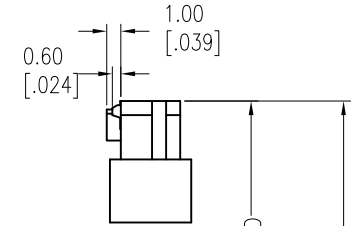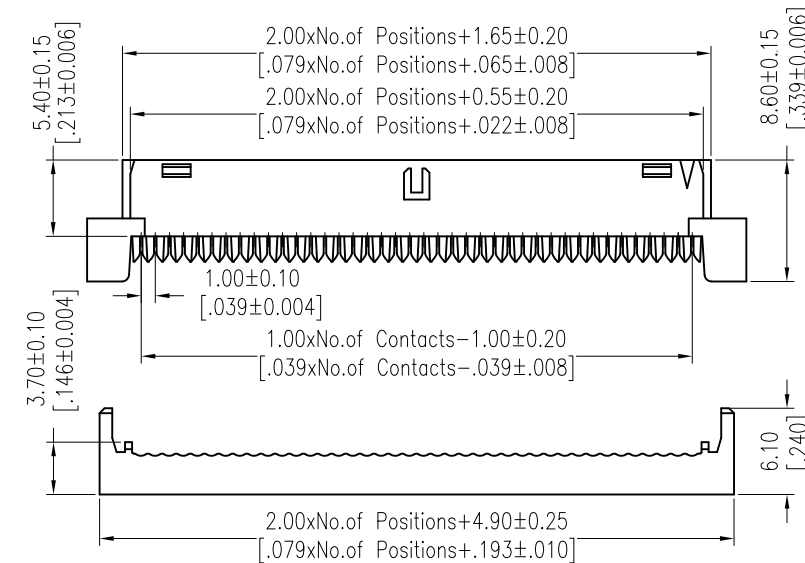

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Tsingsn	DATE	SCALE	FIT	PART NO. 5226-XXYPXXBW01
				Angle	DIM TOL					
A1	2012/07/28	MODIFY	---	X.X	±0.40	CHECK	DATE	UNIT	mm	TITLE: 2.00mm IDC SOCKET "M" TYPE (WITH RAMP LOCKING)
A0	2010/09/28	NEW	---	X.XX	±0.25					
			---	X.XXX	±0.15					
			---		± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
			---			PROJ.				