

# TAI-SAW TECHNOLOGY CO., LTD. No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C. TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

# **Product Specifications Approval Sheet**

Product Name: SAW Filter 460MHz SMD 5.0×5.0mm

TST Parts No.:TA0312A									
Customer Parts No.:									
	Customer signature required								
	Company:								
	Division:								
	Approved by :								
	Date:								
Checked by:		Anne Chen	建秀直						
Approval by:		Andy Yu	Andy In						
Date:		2019/07/22							

- 1. Customer signed back is required before TST can proceed with sample build and receive orders.
- 2. Orders received without customer signed back will be regarded as agreement on the specifications.
- 3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



Taoyuan, 324, Taiwan, R.O.C. FAX: 886-3-4697532

TEL: 886-3-4690038 E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

#### SAW Filter 460 MHz

MODEL NO.: TA0312A REV. NO.:3.0

#### A. MAXIMUM RATING:


1. Input Power Level: 10 dB<sub>m</sub>

2. 2.DC voltage: 3 V

3. Operating Temperature: -40°C to +85°C

4. Storage Temperature: -40°C to +85°C

5. Moisture Sensitivity Level: Level 1(MSL1)



Electrostatic Sensitive Device


#### B. <u>ELECTRICAL CHARACTERISTICS</u>:

Item		Unit	Min.	Type.	Max.
Center frequency	Fc	MHz	-	460	-
Insertion Loss	ILmin (reference level)	dB	-	1.5	3.0
1dB Bandwidth	$BW_{-1dB}$	MHz	-	21.6	-
3dB Bandwidth	BW <sub>-3dB</sub>	MHz	20	24.5	-
Absolute Attenuation:(Reference	ce level from 0dB)				
F <sub>c</sub> -40.8 to F <sub>c</sub> -100	MHz	dB	42	57	-
$F_c + 40$ to $F_c + 100$	MHz	dB	40	46	-
Source impedance	Zs	Ω	-	50	-
Load impedance	ZL	Ω	-	50	-


Note: ILmin is the minimum of the pass band attenuation. The center frequency Fc is the mean value of the upper and lower frequencies at the 3dB filter attenuation level relative to the ILmin.


# C. Frequency Characteristics:




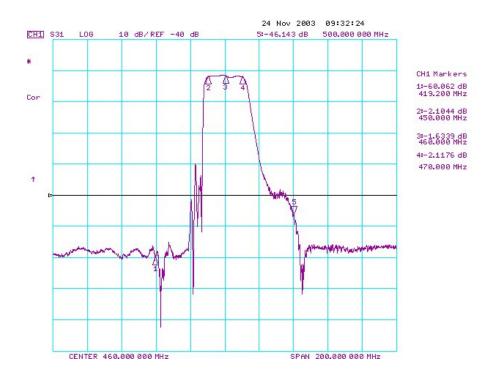

#### D.**OUTLINE DRAWING**:









#2: Input

#6: Output

 $#1 \cdot 3 \cdot 4 \cdot 5 \cdot 7 \cdot 8$ : Ground

△:Year code

□: Date code

Unit: mm

#### Product / Year Code- 4year cycle


Year	2017 2018		2019	2020	
	2021 2022		2023	2024	
Product Code	Α	а	<u>A</u>	<u>a</u>	

#### Week Code Table


WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
Α	В	С	D	E	F	G	Н	I	J	K	L	М
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	0	Р	Q	R	S	Т	U	V	W	Х	Υ	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
а	b	С	d	е	f	g	h	i	j	k	I	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	0	р	q	r	s	t	u	V	w	Х	у	Z

# E. MEASUREMENT CIRCUIT:

HP Network analyzer

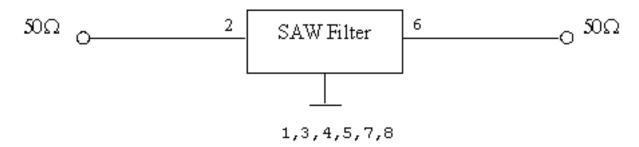


# F. PCB FOOTPRINT:

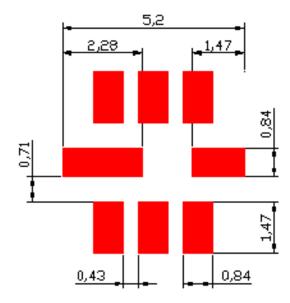


# G. PACKING:

#### 1. REEL DIMENSION

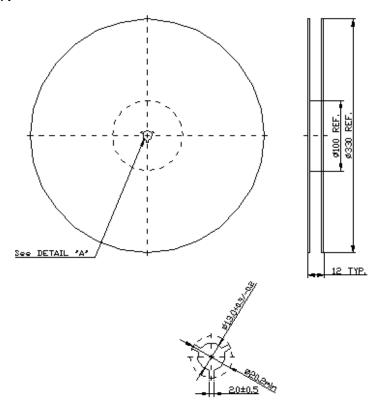

#### 2. TAPE DIMENSION

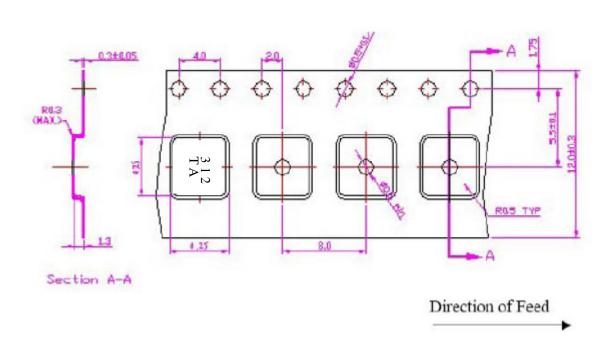

#### H. RECOMMENDED REFLOW PROFILE:

- 1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
- 2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
- 3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
- 4. Time: 2 times.

