MCR series - low ohmic -


Datasheet

Features

1) Very-low ohmic resistance from $47m\Omega$ is in lineup by thick-film resistive element.

2) ROHM resistors have obtained ISO9001 / IATF16949 certification.


3) Corresponds to AEC-Q200



	Si	ze		Packaging		Automotive
Part No.	(mm)	(inch)	Type code	specifications	Quantity/Reel	grade available
MCR006	0603	0201	YLP	Paper tape(2mmpitch)	15,000	Yes
MCR01	1005	0402	MZP	Paper tape(2mmpitch)	10,000	Yes
MCR03	1608	0603	EZP	Paper tape(4mmpitch)	5,000	Yes
MCR10	2012	0805	EZH	Paper tape(4mmpitch)	5,000	Yes
MCR18	3216	1206	EZH	Paper tape(4mmpitch)	5,000	Yes
▲ MCR25	3225	1210	JZH	Embossed tape(4mmpitch)	4,000	Yes
▲ MCR50	5025	2010	JZH	Embossed tape(4mmpitch)	4,000	Yes
▲ MCR100	6432	2512	JZH	Embossed tape(4mm pitch)	4,000	Yes

*▲:NRND(Not Recommended for New Design)

Part number description

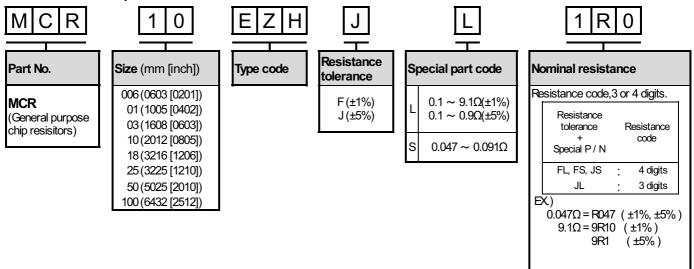


Products I	ist																
Part No.	Type code	Rated power (70°C)	Limiting element voltage	Temperature coefficient	Resistance tolerance	Resistanc	-	Operating temperature range									
		(W)	(V)	(ppm / °C)	(%)	Ω))	(°C)									
MCR006	YLP	0.05	0.67	+600/-200	F(±1%)	1.0≦R≦9.1	(E24 series)	-55 ~ +125									
MCR01	MZP	0.063	0.76	±400	F(±1%)	1.0≦R≦9.1	(E24 series)	-55 ~ +155									
MCR03	EZP	0.1	0.95	±400	F(±1%)	1.0≦R≦9.1	(E24 series)	-55 ~ +155									
				500±300	J(±5%)	0.047≦R≦0.091	(E24 series)										
				400±200	J(±5%)	0.1≦R≦0.13	(E24 series)	1									
MCD40	E2 11	0.05	1 5 1	±250	J(±5%)	0.15≦R≦0.91	(E24 series)										
MCR10	EZH	0.25	1.51	500±300	F(±1%)	0.047≦R≦0.091	(E24 series)	-55 ~ +155									
				400±200	F(±1%)	0.1≦R≦0.13	(E24 series)	1									
					±250	F(±1%)	0.15≦R≦9.1	(E24 series)	1								
				500±300	J(±5%)	0.047≦R≦0.091	(E24 series)										
				400±200	J(±5%)	0.1≦R≦0.13	(E24 series)										
MCR18	EZH	0.25	1.51	±250	J(±5%)	0.15≦R≦0.91	(E24 series)	-55 ~ +155									
WORTO		0.25		500±300	F(±1%)	0.047≦R≦0.091	(E24 series)										
														400±200	F(±1%)	0.1≦R≦0.13	(E24 series)
				±250	F(±1%)	0.15≦R≦9.1	(E24 series)										
				300±300	J(±5%)	0.047≦R≦0.091	(E24 series)										
▲ MCR25	JZH	0.5	2.13	±200	J(±5%)	0.1≦R≦0.91	(E24 series)	-55 ~ +155									
	JZH	0.5	2.13	300±300	F(±1%)	0.047≦R≦0.091	(E24 series)										
				±200	F(±1%)	0.1≦R≦9.1	(E24 series)										
				500±300	J(±5%)	0.047≦R≦0.091	(E24 series)										
				400±200	J(±5%)	0.1≦R≦0.13	(E24 series)										
▲ MCR50	JZH	0.5	2.13	±250	J(±5%)	0.15≦R≦0.91	(E24 series)	-55 ~ +155									
	5211	0.0	2.10	500±300	F(±1%)	0.047≦R≦0.091	(E24 series)	-00 - 100									
				400±200	F(±1%)	0.1≦R≦0.13	(E24 series)										
				±250	F(±1%)	0.15≦R≦9.1	(E24 series)										
				500±300	J(±5%)	0.047≦R≦0.091	(E24 series)	1									
				400±200	J(±5%)	0.1≦R≦0.13	(E24 series)	4									
▲ MCR100	JZH	1	3.01	±250	J(±5%)	0.15≦R≦0.91	(E24 series)	-55 ~ +125									
	02.1		3.01	500±300	F(±1%)	0.047≦R≦0.091	(E24 series)										
				400±200	F(±1%)	0.1≦R≦0.13	(E24 series)	4									
				±250	F(±1%)	0.15≦R≦9.1	(E24 series)										


* Design and specifications are subject to change without notice. Carefully check the specification sheet supplied with the product before using or ordering it.



•Chip resistor dimensions and markings

MCR 006 / 01 / 03





There are three or four digits used for the calculation number according to IEC code and Ris used for the decimal point.


b,		<u>+</u> (b		<u>+</u> `			(Unit:mm)	
Part No.	Type code	(mm)	(inch)	L	W	t	а	b	Marking existence
MCR006	YLP	0603	0201	0.60 ±0.03	0.30 ±0.03	0.23±0.03	0.10±0.05	0.15±0.05	No
MCR01	MZP	1005	0402	1.00 ±0.05	0.50 ±0.05	0.35±0.05	0.20±0.10	0.25 ^{+0.05} -0.10	No
MCR03	EZP	1608	0603	1.60 ±0.10	0.80 ±0.10	0.45±0.10	0.30±0.20	0.30±0.20	3digits
MCR10	EZH	2012	0805	2.00 ±0.10	1.25±0.10	0.55±0.10	0.40±0.20	0.40±0.20	Yes
MCR18	EZH	3216	1206	3.20 ±0.15	1.60 ±0.15	0.55±0.10	0.50 ±0.25	0.50±0.25	Yes
MCR25	JZH	3225	1210	3.20 ±0.15	2.50 ±0.15	0.55±0.10	0.50 ±0.25	0.50±0.25	Yes
MCR50	JZH	5025	2010	5.00 ±0.15	2.50 ±0.15	0.55 ±0.15	0.60±0.25	0.60±0.25	Yes
MCR100	JZH	6432	2512	6.30 ±0.15	3.20 ±0.15	0.55±0.15	0.60±0.25	0.60±0.25	Yes

а

W

Įt

•Land pattern example





				(Unit:mm)
Dimensions Part No.	А	В	С	D
MCR006	0.3	0.84	0.3	0.27
MCR01	0.5	1.3	0.5	0.4
MCR03	1.0	2.0	0.8	0.5
MCR10	1.2	2.6	1.15	0.7
MCR18	2.2	4.0	1.5	0.9
MCR25	2.2	4.0	2.3	0.9
MCR50	3.8	6.0	2.3	1.1
MCR100	5.1	8.1	3.0	1.5



•Derating curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curve below. **MCR 006 / 100 MCR 01 / 03 / 10 / 18 / 25 / 50**





Characteristics

Test items	Guaranteed value	Test conditions
Resistance	See "Products list"	20°C
Variation of resistance with temperature	See "Products list"	Measurement: +25/-55, +25/+125°c
Overload	±(2.0%+0.005Ω)	Rated voltage(current)×2.5, 2s Maximum overload voltage
Solderability	Anew uniform coating of minimum of 95% of the surface being immersed and no soldering damage.	Rosin-ethanol solution25% (mass) Soldering condition : 245±5°C Duration of immersion : 2.0±0.5s
Resistance to soldering heat	±(1.0%+0.005Ω) No remarkable abnormality on the appearance.	Soldering condition : 260±5°C Duration of immersion : 10±1s
Rapid change of temperature	±(1.0%+0.005Ω)	Test temp: -55°c~+125°c 1000cycles(MCR01) -55°c~+125°c 100cycles(MCR006) -55°c~+125°c 5cycles(MCR03/10/18/25/50/100)
Damp heat, steady state	±(3.0%+0.005Ω)	40 °C, 93%(Relative humidity) Test time: 1,000h
Endurance at 70°C	±(3.0%+0.005Ω)	Rated voltage(current),70°C±3°C 1.5h:ON−0.5h:OFF Test time: 1,000h
Endurance	±(3.0%+0.005Ω)	155°C(MCR01/03/10/18/25/50) 125°C(MCR006/100) Test time : 1,000h
Resistance to solvent	±(1.0%+0.005Ω)※ MCR006only ±(0.5%+0.005Ω)	23±5°C, Immersion cleaning, 5±0.5min, Solvent: 2-propanol
Bend strength of the end face plating	Without mechanical damage such as breaks.	-

※Maximum overload voltage (Test voltage)


			99 (1991				
MCR006	MCR01	MCR03	MCR10	MCR18	MCR25	MCR50	MCR100
1.34V	1.52V	1.90V	3.02V	3.02V	4.26V	4.26V	6.02V

Compliance Standard(s): IEC60115-8 JIS C 5201-1






•Tape dimensions



						(Unit : mm)
Part No.	Type code	W	F	E	A0	BO
MCR006	YLP	8.0±0.2	3.5±0.05	1.75 <i>±</i> 0.1	0.38±0.03	0.68±0.03
MCR01	MZP	8.0±0.3	3.5±0.05	1.75±0.1	0.7±0.1	1.2±0.1
MCR03	EZP	8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
MCR10	EZH	8.0±0.3	3.5±0.05	1.75±0.1	1.65 ^{+0.2} -0.1	2.4 ^{+0.2} -0.1
MCR18	EZH	8.0±0.3	3.5±0.05	1.75±0.1	1.95 ^{+0.1} -0.05	3.5 ^{+0.15} -0.05

Part No.	Type code	D0	P0	PI	P2	T2
MCR006	YLP	Ф1.5 ^{+0.1}	4.0±0.1	2.0 ±0.05	2.0±0.05	MAX0.5
MCR01		Ф1.5 ^{+0.1}	4.0±0.1	2.0 ±0.05	2.0±0.05	MAX1.1
MCR03		Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
MCR10		Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
MCR18	EZH	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1

■Embossed tape




						(Unit:mm)
Part No.	Type code	W	F	E	A0	BO
MCR25	JZH	8.0±0.3	3.5±0.05	1.75±0.1	3.0±0.1	3.5±0.1
MCR50	JZH	12.0 ±0.3	5.5±0.05	1.75±0.1	3.4±0.2	5.6±0.2
MCR100	JZH	12.0 ±0.3	5.5±0.05	1.75±0.1	3.5±0.2	6.7±0.2

Part No.	Type code	D0	F0	P1	P2	К
MCR25	JZH	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
MCR50	JZH	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
MCR100	JZH	Ф1.5 ^{+0.1} 0	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1



•Reel dimensions

Using two kinds of reels for taping.

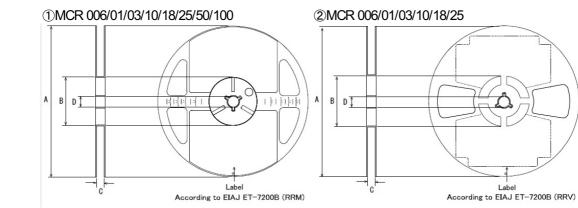

					(Unit:mm)
Part No.	Type code	A	В	С	D
MCR006	YLP				
MCR01	MZP				
MCR03	EZP			9 <mark>+1.0</mark> 0	
MCR10	EZH	Ф180 ⁰ , -	Ф60 ^{+1.0}	⁹ 0	Ф13±0.2
MCR18	EZH	-1.5	ФОО ₀		ΨI3±0.2
MCR25	JZH				
MCR50	JZH			13 ^{+1.0}	
MCR100	JZH			130	



Notice

Precaution on using ROHM Products

 If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

JAPAN	USA	EU	CHINA
CLASSII	CLASSI	CLASS II b	CLASSⅢ
CLASSⅣ		CLASSII	

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:

[a] Installation of protection circuits or other protective devices to improve system safety

[b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure

- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (Exclude cases where no-clean type fluxes is used. However, recommend sufficiently about the residue.); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse, is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- 9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- 2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- 3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

General Precaution

- 1. Before you use our Products, you are requested to care fully read this document and fully understand its contents. ROHM shall not be in an y way responsible or liable for failure, malfunction or accident arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this docume nt is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sale s representative.
- 3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.