
EVERLIGH EVERLIGH

DATASHEET

SMD • B 27-21/G6C-AL1N1B/3C



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The 27-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- · Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Copyright © 2010, Everlight All Rights Reserved. Release Date :Nov,30.2014 Issue No: DSE-0006748 Rev.2 WWW.everlight.com

Device Selection Guide

Chip Materials	Emitted Color	Resin Color			
AlGaInP	Brilliant Yellow Green	Water Clear			
Absolute Maximum Ratings (Ta=25)					

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
Forward Current	I _F	25	mA	
eak Forward Current (Duty 1/10 @1KHz)	I _{FP}	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge	ESD _{HBM}	2000	V	
Operating Temperature	T _{opr}	-40 ~ +85		
Storage Temperature	Tstg	-40 ~ +90		
Soldering Temperature	Tsol	U U	or 10 sec. 3 sec.	

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	11.5		36.0	mcd	_
Viewing Angle	20 _{1/2}		130		deg	_
Peak Wavelength	λρ		575		nm	
Dominant Wavelength	λd	569.5		577.5	nm	[–] I _F =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	_
Forward Voltage	V _F	1.75		2.35	V	
Reverse Current	I _R			10	μA	V _R =5V
Note: 1.Tolerance of Luminous Intensity: ±11% 2.Tolerance of Dominant Wavelength ±1nm 3. Tolerance of Forward Voltage: ±0.1V						

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
L1	11.5	14.5		
L2	14.5	18.0		
M1	18.0	22.5	mcd	I _F =20mA
M2	22.5	28.5		
N1	28.5	36.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
C16	569.5	571.5		
C17	571.5	573.5	nm	I _F =20mA
C18	573.5	575.5	nm	IF -2011A
C19	575.5	577.5		

Bin Range Of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
0	1.75	1.95		
1	1.95	2.15	V	I _F =20mA
2	2.15	2.35		


Note:


1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage: ±0.1V

Typical Electro-Optical Characteristics Curves

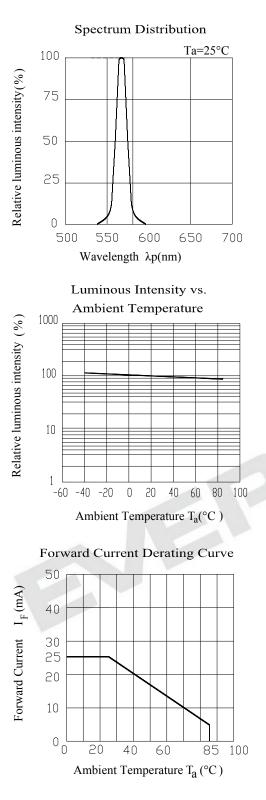

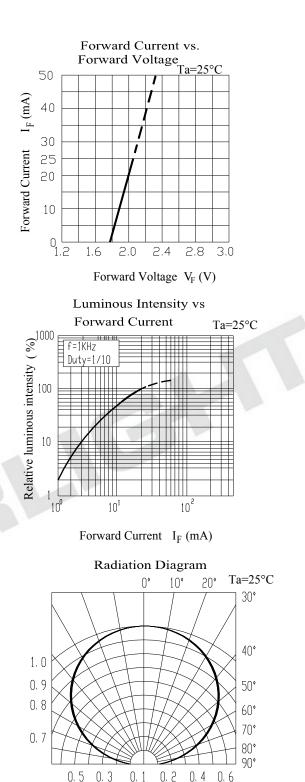

5 R Copyright © 2010, Everlight All Rights Reserved. Release Date : Nov.30.2014 Issue No: DSE-0006748 Rev.2 www.everlight.com

0, 1


0, 4

0, 6

0. 5


EVERLIGHT

Package Dimension

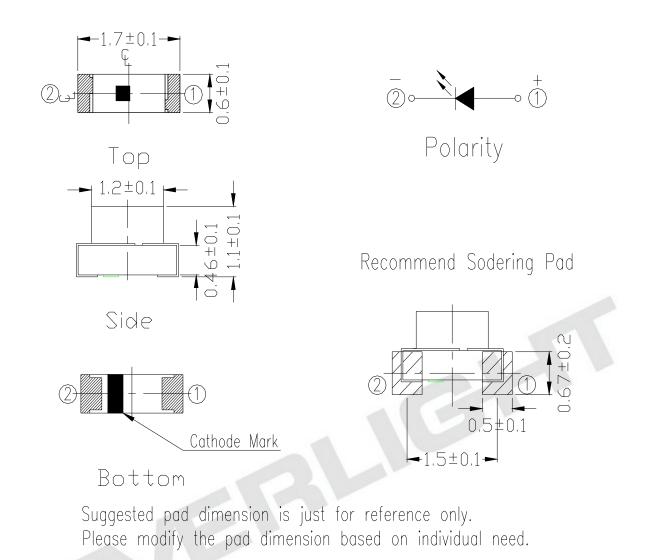


Note: Tolerances unless mentioned ±0.1mm. Unit = mm

Moisture Resistant Packing Materials Label Explanation



- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


Reel Dimensions

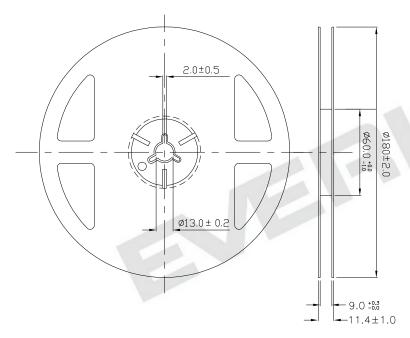

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

Aluminum moisture-proof bag

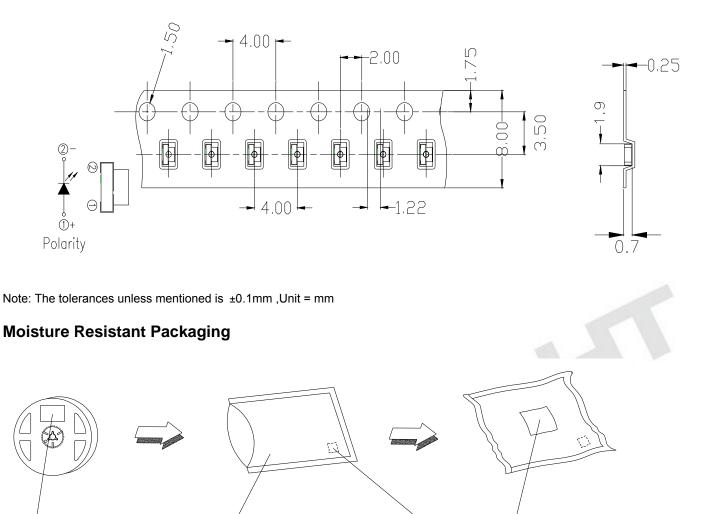

Desiccant

R 8 Copyright © 2010, Everlight All Rights Reserved. Release Date : Nov.30.2014 Issue No: DSE-0006748 Rev.2 WWW.everlight.com

Label

Label



Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big

current change (Burn out will happen).

2. Storage


- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package .
- If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. for 24 hours.

Baking treatment : 60±5

3. Soldering Condition

3.1 Pb-free solder temperature profile

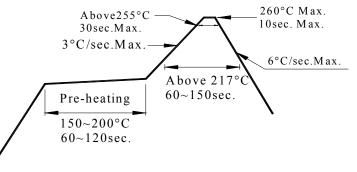

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

R 10 Copyright © 2010, Everlight All Rights Reserved. Release Date : Nov.30.2014 Issue No: DSE-0006748 Rev.2 WWW.everlight.com