

Technical Data Sheet Chip LED with Right Angle Lens

12-21C/T7D-AT1U1N/2C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 12-21C SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Part No.	Chip Material	Emitted Color	Resin color
12-21C/T7D-AT1U1N/2C	InGaN	Pure White	Yellow Diffused

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 12


Device No.: DSE-0006910 Prepared by: Deng Huanyu Prepared date:12-Apr..-2012 Release Date: 2012-04-18 19:00:26.0 Revision : 1

LifecyclePhase:







Package Outline Dimensions














Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 1

Page: 2 of 12

Device No.: DSE-0006910

Prepared date:12-Apr..-2012

Prepared by: Deng Huanyu

Release Date:2012-04-18 19:00:26.0

Revision : 1 LifecyclePhase:

正式發行 Approved



Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	${ m I_{FP}}$	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	
Storage Temperature	Tstg	-40 ~ +90	
Soldering Temperature	Tsol	Reflow Soldering: 260 Hand Soldering: 350	for 10 sec. for 3 sec.

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_{V}	285		565	mcd	
Viewing Angle	2 1/2	\	110		deg	I _F =20mA
Forward Voltage	V_{F}	2.70		3.70	V	
Reverse Current	I_R			50	μA	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu

Revision : 1 Release Date:2012-04-18 19:00:26.0

LifecyclePhase: 正式發行 Approved Expired Period: Forever



Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
T1	285	360		
T2	360	450	mcd	I _F =20mA
U1	450	565		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
	10	2.70	2.90		
	11	2.90	3.10		
N	12	3.10	3.30	V	I _F =20mA
	13	3.30	3.50		
	14	3.50	3.70		

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu

Revision : 1 Release Date:2012-04-18 19:00:26.0



Chromaticity Coordinates Specifications for Bin Grading

Groups	Bin Code	CIE_x	CIE_y	Condition
	1	0.274	0.226	
		0.274	0.258	
		0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
	2	0.294	0.319	
		0.294	0.286	
		0.294	0.254	
	3	0.294	0.286	
	3	0.314	0.315	
A		0.314	0.282	$I_F = 20 \text{mA}$
A	4	0.294	0.286	IF— ZUIIIA
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	
	5	0.314	0.282	
		0.314	0.315	
		0.334	0.343	
		0.334	0.311	
		0.314	0.315	
	6	0.314	0.347	
		0.334	0.376	
		0.334	0.343	

Notes:


- 1.The C.I.E. 1931 chromaticity diagram (Tolerance ±0.01).
- 2. The products are sensitive to static electricity and care must be fully taken when handling products.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 5 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu Revision : 1 Release Date:2012-04-18 19:00:26.0



CIE Chromaticity Diagram

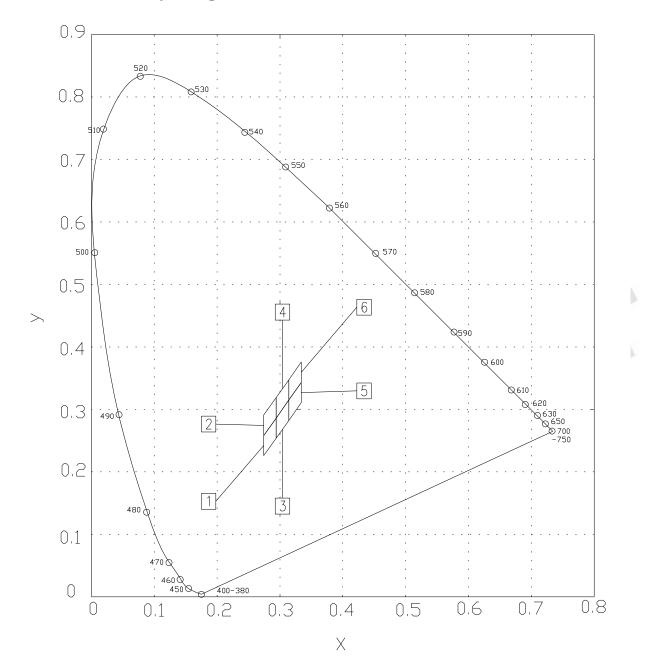

Everlight Electronics Co., Ltd.

Device No.: DSE-0006910

: 1 正式發行 Approved LifecyclePhase:

Revision

http://www.everlight.com

Rev. 1


Page: 6 of 12


Prepared date:12-Apr..-2012


Prepared by: Deng Huanyu Release Date: 2012-04-18 19:00:26.0





Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 7 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu Revision : 1 Release Date:2012-04-18 19:00:26.0




Label explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



Reel Dimensions

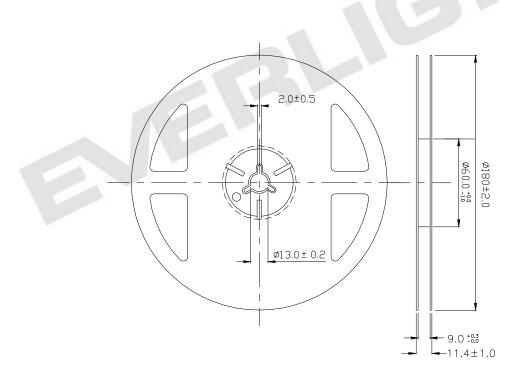

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 1

Release Date:2012-04-18 19:00:26.0

Page: 8 of 12

Device No.: DSE-0006910

Prepared date:12-Apr..-2012

Prepared by: Deng Huanyu


: 1 正式發行 Approved LifecyclePhase:

Revision




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

Progressive direction_

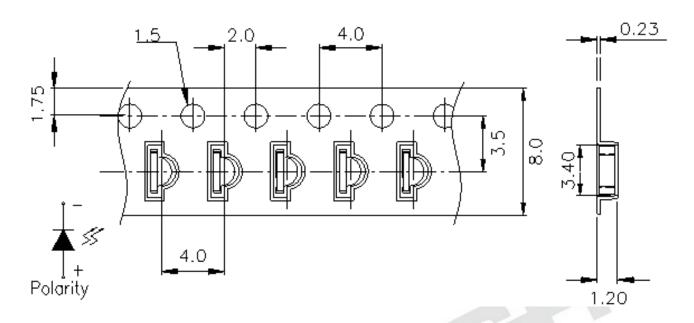

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Moisture Resistant Packaging

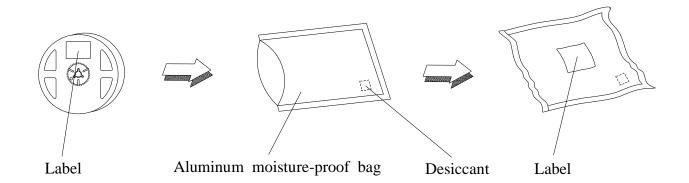

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev. 1

Page: 9 of 12

Device No.: DSE-0006910

Prepared date:12-Apr..-2012 Pre

Prepared by: Deng Huanyu

Release Date:2012-04-18 19:00:26.0

Revision : 1 LifecyclePhase: Approx



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H: +100 15min 5 min L: -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100 5min 10 sec L:-10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp.: 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu

Revision: 1 Release Date:2012-04-18 19:00:26.0




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

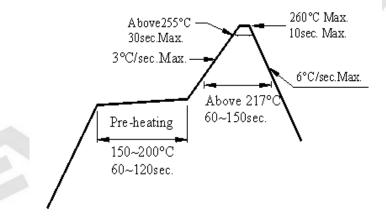

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 11 of 12

Device No.: DSE-0006910 Prepared date:12-Apr..-2012 Prepared by: Deng Huanyu Revision : 1 Release Date:2012-04-18 19:00:26.0

LifecyclePhase: Approved Expired Period: Forever




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

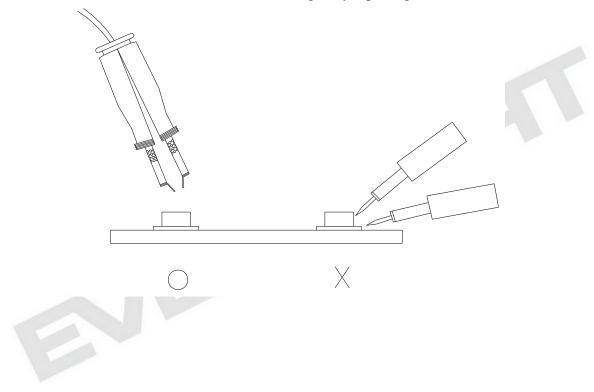

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 12 of 12

Prepared date:12-Apr..-2012 Device No.: DSE-0006910 Prepared by: Deng Huanyu Release Date:2012-04-18 19:00:26.0 **Revision** : 1

LifecyclePhase: **Expired Period: Forever** Approved