


Technical Data Sheet

White SMD Surface Mount Device

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color:x=0.29,y=0.30
- Pb free
- The product itself will remain within RoHS compliant version.
- ESD protection.



The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

	Dasin Calan		
Material	Emitted Color	Resin Color	
InGaN	White	Water Clear	

67-11/W1C-FV1W2F/2T




Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 11

Device No.: DSE-0001289 Prepared date:23-Nov.-2016 Prepared by: Forrest Chen

67-11/W1C-FV1W2F/2T

Package Dimensions

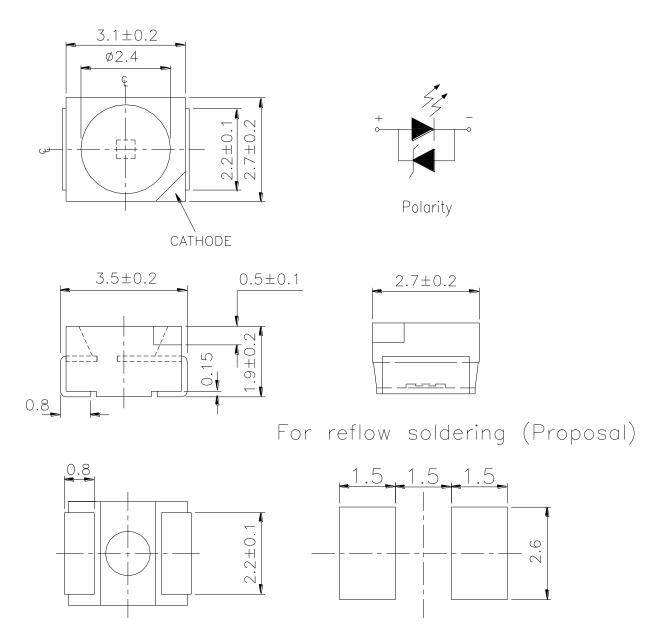

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



67-11/W1C-FV1W2F/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	I F	25	mA	
Forward Current	IF		IIIA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$	
Electrostatic Discharge(HBM)	ESD	2000	V	
Power Dissipation	Pd	110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA	
		Reflow Soldering: 260 °C for 10 sec.		
Soldering Temperature	Tsol	Hand Soldering : 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Units	Condition
Luminous Intensity	Iv	715		1800	mcd	I _F =20mA
Forward Voltage	V_{F}	2.70		3.50	V	I _F =20mA
Viewing Angle	2 0 1/2		120		deg	I _F =20mA

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 11

Device No.: DSE-0001289 Prepared date:23-Nov.-2016 Prepared by: Forrest Chen



67-11/W1C-FV1W2F/2T

Bin Range Of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition		
V1	715	900	mcd			
V2	900	1120		I _F =20mA		
W1	1120	1420				
W2	1420	1800				

Bin Range Of Forward Voltage

Group	Bin Code	Min.	Max.	Unit	Condition
F	10	2.70	2.90		I _F =20mA
	11	2.90	3.10	V	
	12	3.10	3.30		
	13	3.30	3.50		

Notes:

1.Tolerance of Luminous Intensity ±10%


2. Tolerance of Forward Voltage $\pm 0.1 V$



67-11/W1C-FV1W2F/2T

Group	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
F	В3	0.287	0.295		0.307	0.315
		0.283	0.305	D/I	0.304	0.33
		0.304	0.330	B4	0.33	0.36
		0.307	0.315		0.33	0.339
	B5	0.296	0.276		0.311	0.294
		0.287	0.295	B6	0.307	0.315
		0.307	0.315	В	0.330	0.339
		0.311	0.294		0.330	0.318

*The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).

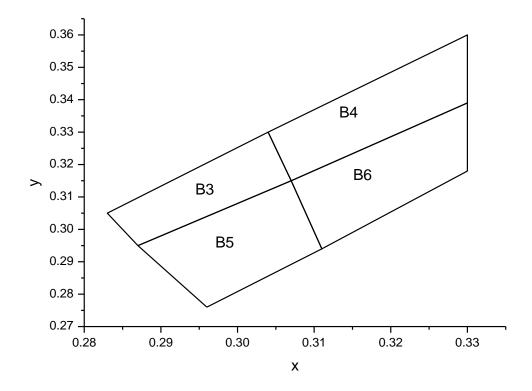

 $Everlight\ Electronics\ Co.,\ Ltd.$

Device No.: DSE-0001289

http://www.everlight.com


Prepared date:23-Nov.-2016


Rev. 2 Page: 5 of 11


Prepared by: Forrest Chen


67-11/W1C-FV1W2F/2T

Typical Electro-Optical Characteristics Curves










Forward Voltage(V_P-volts



Radiation Diagram

0° 10° 20° Ta=25°

1.0

0.9

0.7

0.5

0.3

0.1

0.2

0.4

0.6




67-11/W1C-FV1W2F/2T

Label Explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



Reel Dimensions

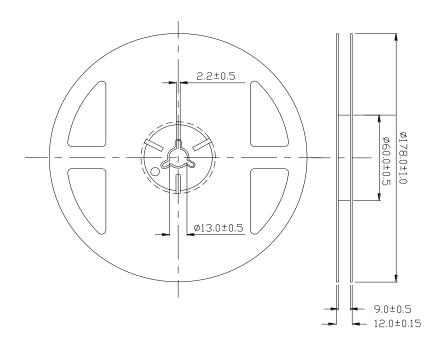


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm




67-11/W1C-FV1W2F/2T

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

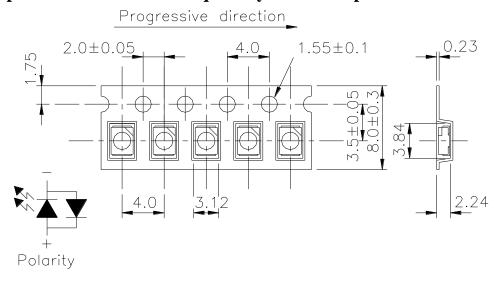

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

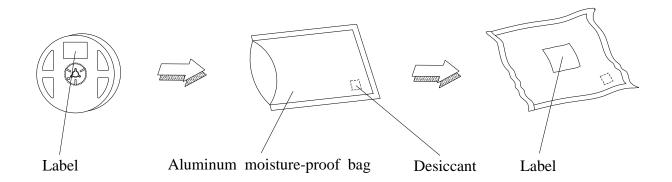

http://www.everlight.com

Everlight Electronics Co., Ltd.

Device No.: DSE-0001289 Prepared date:23-Nov.-2016

Rev. 2

Page: 8 of 11

Prepared by: Forrest Chen



67-11/W1C-FV1W2F/2T

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	If = $20 \text{ mA} / 25^{\circ}\text{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

Device No.: DSE-0001289

http://www.everlight.com

Prepared date:23-Nov.-2016

Rev. 2 Page: 9 of 11

Prepared by: Forrest Chen



67-11/W1C-FV1W2F/2T


Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life are 72 hours under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

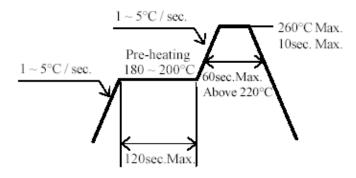

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 11


Device No.: DSE-0001289 Prepared date:23-Nov.-2016 Prepared by: Forrest Chen



67-11/W1C-FV1W2F/2T

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

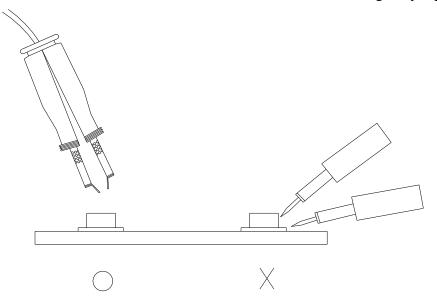

Everlight Electronics Co., Ltd. http://www.everlight.com
Device No.: DSE-0001289 Prepared date:23-Nov.-2016

Rev. 2 Page: 11 of 11 Prepared by: Forrest Chen



DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 12 of 11

Device No.: DSE-0001289 Prepared date:23-Nov.-2016 Prepared by: Forrest Chen