

PARA LIGHT ELECTRONICS CO., LTD.

11F., No. 8, Jiankang Rd., Zhonghe Dist., New Taipei City 235, Taiwan,Tel: 886-2-2225-3733Fax: 886-2-2225-4800E-mail: para@para.com.twwww.paralighttaiwan.com



PART NO.: LS115JFLGCT

REV: <u>A/0</u>

CUSTOMER'S APPROVAL : _____ DRAWING NO. : DS-78-21-0001G _____ DCC : ____ DATE : 2021-01-23 PAGE


1 of 13



Part No. : LS115JFLGCT

REV: A / 0

PACKAGE OUTLINE DIMENSIONS

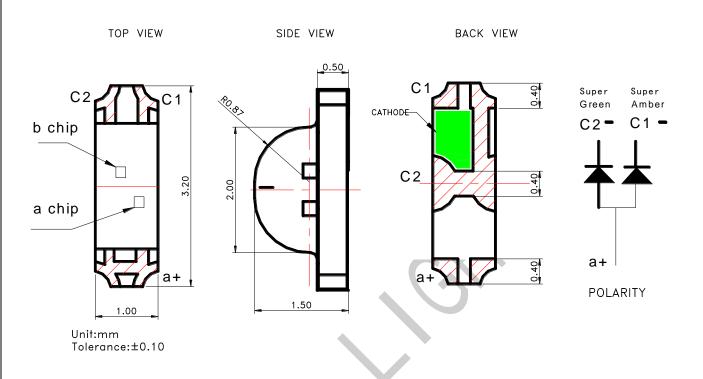

Notes:

- 1. a chip: Super Amber; b chip: Super Green.
- 2. All dimensions are in millimeters.
- 3. Tolerance is \pm 0.1mm (.004") unless otherwise noted.

Features

- * Dual color, <u>common anode</u>, side view Chip LED.
- * Package in 8mm tape on 7" diameter reels.
- * Compatible with automatic Pick & Place equipment.
- * Compatible with Reflow soldering and Wave soldering processes.
- * EIA STD package.
- * I.C. compatible.
- * Pb free product.
- * Meet RoHS Green Product.
- * Moisture sensitivity level: 3

DRAWING NO. : DS-78-21-0001G

DATE : 2021-01-23 PAGE 2 of 13



Part No. : LS115JFLGCT

REV: A / 0

• Chip Materials

chip	Light Color	Dice Material	Lens Color
a	KF Super Amber	AlInGaP	White Clear
b	LG: Super Green	InGaN	White Clear

• Absolute Maximum Ratings(Ta= 25° C)

Symbol	Parameter	Rat	Unit	
Symbol	r ai ametei	Super Amber	Super Green	Unit
PD	Power Dissipation	75	100	mW
Inc	Peak Forward Current	80	100	mA
Ipf	(1/10 Duty Cycle, 0.1ms Pulse Width)	00		
IF	Continuous Forward Current	30	25	mA
VR	Reverse Voltage	5	5	V
Topr	Operating Temperature Range	-40 ~ +85		°C
Tstg	Storage Temperature Range	-40 ~ +85		°C

• Electro-Optical Characteristics(Ta=25°C)

Parameter		Symbol	Super Amber	Super Green	Unit	Test Condition	
Luminous Intensity	Min.	IV	45.0	180.0	mcd		
Luminous Intensity	Тур.	IV IV	100.0	600.0		IF=20mA	
Viewing Angle	Тур.	$2 \theta 1/2$	13	30	deg	Note 2	
Peak Wavelength	Тур.	λp	611	518	nm	Measurement @Peak	
Dominant Wavelength	Тур.	λd	605	525	nm	IF=20mA	
Spectral Line Half-Width	Тур.	Δλ	17	15	nm		
Forward Voltage	Тур.	VF	2.0	3.1	V	IF =20mA	
rorward voltage	Max.	۷Г	2.4	3.4	v	$I\Gamma - 20IIIA$	
Reverse Current	Max.	IR	10	50	μA	VR = 5V	

DRAWING NO. : DS-78-21-0001G

DATE : 2021-01-23

3 of 13

PAGE



Part No. : LS115JFLGCT

REV: A / 0

• Bin Code List

Luminous Intensity(IV), Unit:mcd@20mA						
Super Amber (a chip)			Super Green (b chip)			
Bin Code	Min	Max	Bin Code	Max		
Р	45.0	71.0	S	180.0	280.0	
Q	71.0	112.0	Т	280.0	450.0	
R	112.0	180.0	U	450.0	650.0	
			V	650.0	900.0	

Tolerance of each bin are $\pm 15\%$

Forward Voltage(VF), Unit:V@20mA				
Super Green(b chip)				
Bin Code	Min	Max		
K8	2.80	2.95		
К9	2.95	3.10		
K10	3.10	3.25		
K11	3.25	3.40		

Tolerance of each bin are ± 0.1 Volt

Dominant Wavelength (Hue), Unit: nm@20mA				
Super Green(b chip)				
Bin Code	de Min Max			
AP	520	525		
AQ	525	530		

Tolerance of each bin are ± 1 nm

Notes: 1.Luminous intensity is measured with a light sensor and filter combination that proximities the CIE eye-response curve.

- 2. θ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. The dominant wavelength λ d is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Caution in ESD :

Static Electricity and surge damages the LED. It is recommended use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

DRAWING NO. : DS-78-21-0001G



Part No. : LS115JFLGCT

REV: A / 0

• Super Amber Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)




Fig.2 Forward Current vs.Forward Voltage

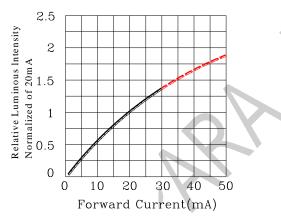


Fig.4 Relative Luminous Intensity vs.Forward Current




Fig.3 Luminous Intensity vs.Forward Current




Fig.5 Luminous Intensity vs.Ambient Temperature

0°

1.0 0.9

0.8

0.7

0.5 0.3

 10°

 20°

30 °

50

60


70

80 °

° 90

0.6

0.4

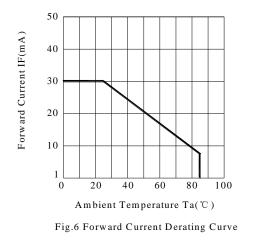

DRAWING NO. : DS-78-21-0001G

DATE : 2021-01-23 PAGE 5 of 13

0.1 0.2

Fig.7 Relative Intensity vs.Angle



Part No. : LS115JFLGCT

REV: A / 0

• Super Green Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)




Fig.2 Forward Current vs.Forward Voltage



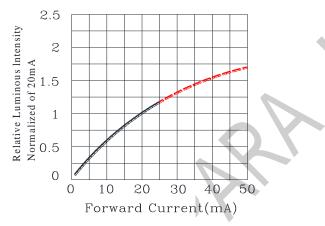


Fig.4 Relative Luminous Intensity vs.Forward Current

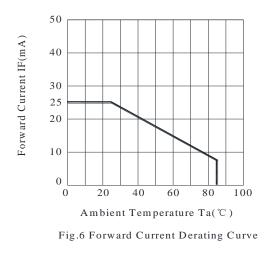

DRAWING NO. : DS-78-21-0001G








Fig.5 Luminous Intensity vs.Ambient Temperature




Fig.7 Relative Intensity vs.Angle


DATE : 2021-01-23 PAGE 6 of 13



Part No. : LS115JFLGCT

REV: A / 0


• Label Explanation			
CUS.PART NO: A			
PART NO: LS115JFLGCT			
LOT NO: C IV: VF:			
QUANTITY: 3000PCS			
DATE CODE: 20100419 RoltS			
ITEM CODE:PARRA LIGHT			
PART NO: LS115JFLGCT			
IV Luminous Intensity Code			
LOT NO: <u>EM S L 12 09</u> 0110 A B C D E F			
AEM: Emos Code			
BS:SMD			
LLocal			
DYear			
EMonth			
FSPEC.			
PACKING QUANTITY OF BAG :			
3000pcs for 150、170、110、155、115 ser	ies		
4000pcs for 191 series			
5000pcs for 192 series			
DATE CODE: <u>2012</u> <u>09</u> <u>10</u>			
G H I			
G Year			
H Month			
I Day			
DRAWING NO. : DS-78-21-0001G	DATE : 2021-01-23	PAGE	7 of 13

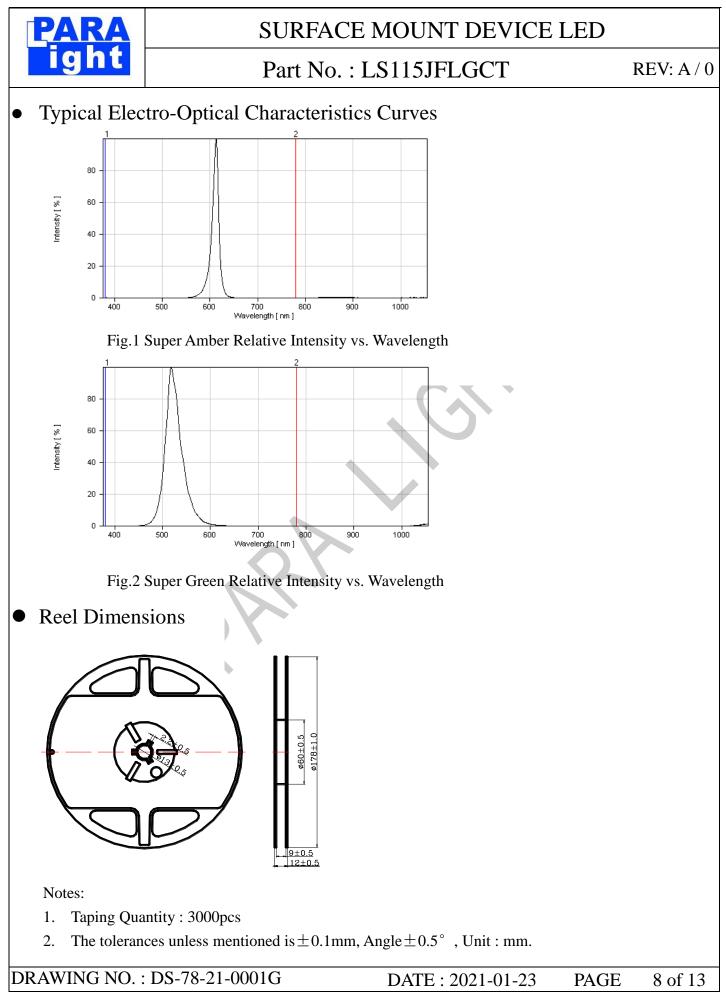



Part No. : LS115JFLGCT

REV: A / 0

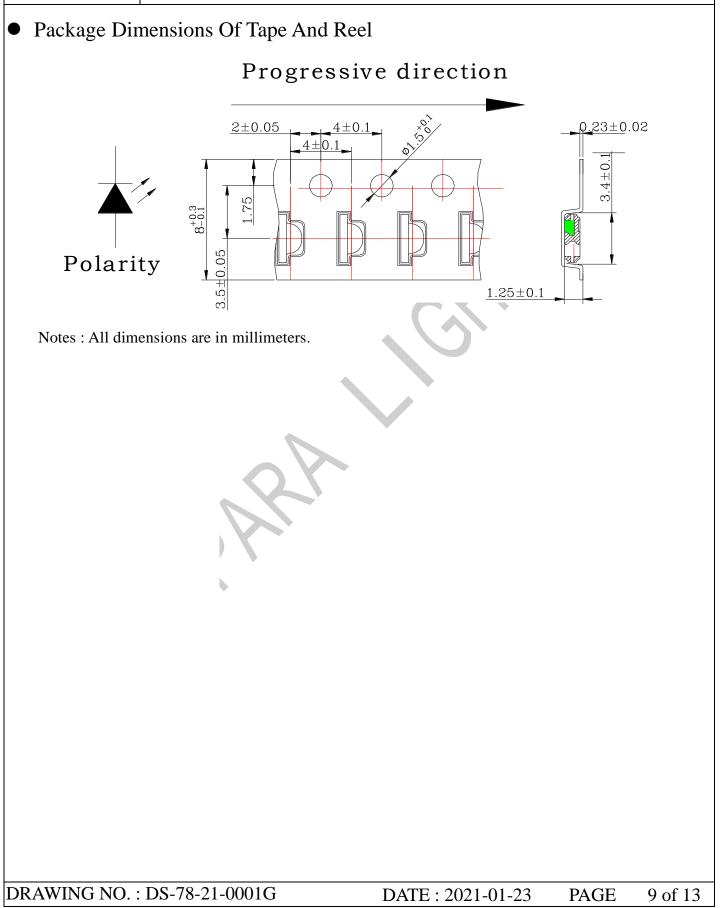




Part No. : LS115JFLGCT

REV: A / 0

• Cleaning

- * If cleaning is required, use the following solutions for less than 1 minute and less than 40° C.
- * Appropriate chemicals: Ethyl alcohol and isopropyl alcohol.
- Effect of ultrasonic cleaning on the LED resin body differs depending on such factors as the oscillator output, size of PCB and LED mounting method. The use of ultrasonic cleaning should be enforced at proper output after confirming there is no problem.

Suggest Soldering Pad Dimensions

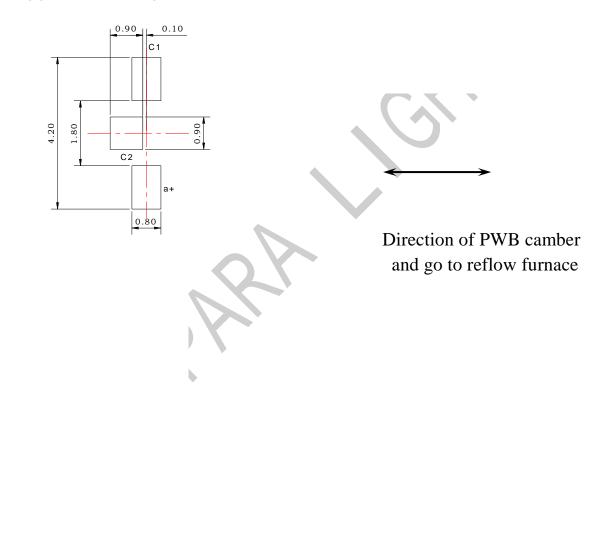




Part No. : LS115JFLGCT

REV: A / 0

• Suggest Sn/Pb IR Reflow Soldering Profile Condition:

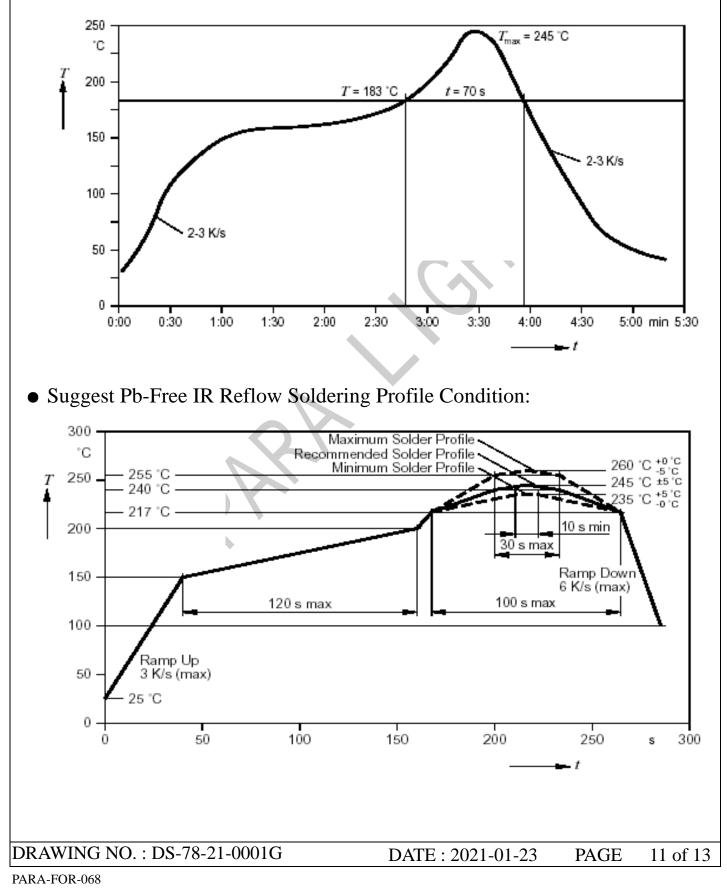



Part No. : LS115JFLGCT

REV: A / 0

• CAUTIONS

1. Application Limitation :

The LED's described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household application).Consult PARA's sales in advance for information on application in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LED's may directly jeopardize life or health (such as airplanes, automobiles, traffic control equipment, life support system and safety devices).

2.Storage :

If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60 ± 5 °C for 24 hours

DRAWING NO. : DS-78-21-0001G

DATE : 2021-01-23 PAGE 12 of 13



Part No. : LS115JFLGCT

REV: A / 0

3.Soldering(Standard Process) :

Do not apply any stress to the lead frame during soldering while the LED is at high temperature. Recommended soldering condition.

Reflow Soldering :

Pre-heat 120~150 °C, 120sec. MAX., Peak temperature : 240 °C Max. Soldering time : 10 sec Max. Soldering Iron : (Not recommended)

Temperature 300 °C Max., Soldering time : 3 sec. Max.(one time only), power dissipation of iron :

20W Max. use SN60 solder of solder with silver content and don't to touch LED lens when soldering. Wave soldering :

Pre-heat 100 $^{\circ}$ C Max, Pre-heat time 60s Max, Solder wave 260 $^{\circ}$ C Max, Soldering time 5 sec. Max. preformed consecutively cooling process is required between 1st and 2nd soldering processes.

4. Lead-Free Soldering

For Reflow Soldering :

- 1、Pre-Heat Temp: 150-180°C,120sec.Max.
- 2、Soldering Temp : Temperature Of Soldering Pot Over 230°C,40sec.Max.
- 3、Peak Temperature : 260° C, 5sec.
- 4、Reflow Repetition: 2 Times Max.
- 5、Suggest Solder Paste Formula 93.3 Sn/3.1 Ag/3.1 Bi /0.5 Cu


For Soldering Iron (Not Recommended):

- 1. Iron Tip Temp : 350° C Max.
- 2、Soldering Iron: 30w Max.
- 3、Soldering Time : 3 Sec. Max. One Time.


For Dip Soldering :

- 1、 Pre-Heat Temp : 150°C Max. 120 Sec. Max.
- 2、Bath Temp: 265° C Max.
- 3、Dip Time : 5 Sec. Max.

5. Drive Method



Circuit model B

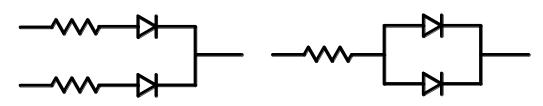

(A)Recommended circuit.

(B)The difference of brightness between LED's could be found due to the Vf-If characteristics of LED.

DRAWING NO. : DS-78-21-0001G

DATE : 2021-01-23 PAGE