

TOM-1088BMB-N

Dot Matrix Display LED

| Part Number | Chip | | Face Color | Segment Color |
|---------------|----------|--------------|------------|---------------|
| | Material | Source Color | | |
| TOM-1088BMB-N | InGaN | Hi-blue | Black | Gray |


Features

- (8x8) ϕ 3.00mm dot matrix
- Row common anode
- I.C. compatible
- Low power requirement
- RoHS compliant

Applications

- Audio equipment
- Instrument panels
- Indoor display

Package Dimensions & Internal Circuit Diagram

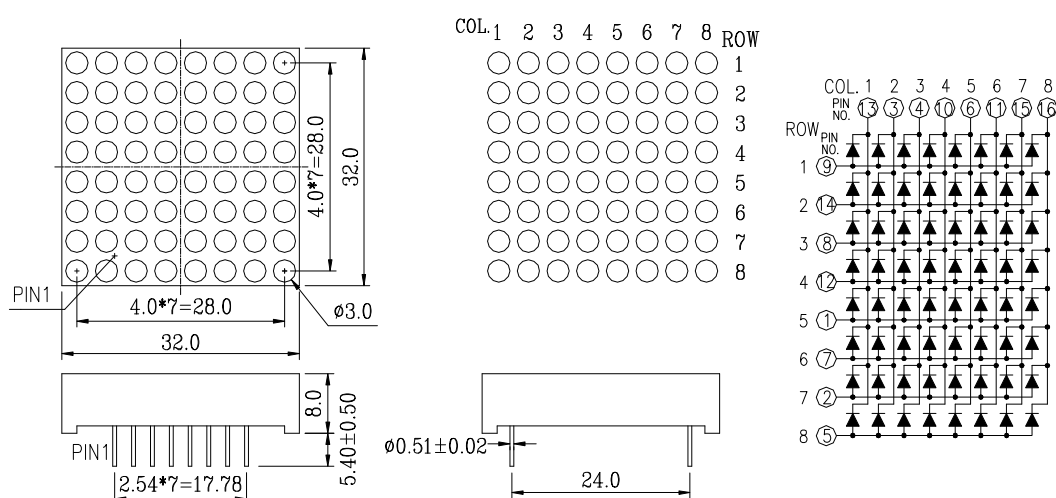

Notes:

1. All dimensions are in millimeters, tolerance: ± 0.25 ; Angle: 3° unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute Maximum Rating @ Ta=25°C

| Parameter | Maximum Rating | Unit |
|--|-----------------|------|
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 80 | mA |
| Power Dissipation Per Dot | 105 | mW |
| Continuous Forward Current | 20 | mA |
| Recommend Operating Current | 12 | mA |
| Reverse Voltage | 5 | V |
| Operating Temperature Range | -25°C to +85°C | |
| Storage Temperature Range | -30°C to +85°C | |
| Lead-Free Solder Temperature (1/16 Inch Below Seating Plane) | 260°C for 3 Sec | |

Electrical / Optical Characteristic @ Ta=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition | Grade |
|----------------------------------|-------------------|------|-------|-------|------|----------------------|-------|
| Luminous Intensity | I _v | | 74045 | | ucd | I _F =10mA | |
| Dominant Wavelength | λ _d | | 465 | | nm | I _F =20mA | |
| Spectral Line Half-Width | Δλ | | 26 | | nm | I _F =20mA | |
| Forward Voltage | V _F | | 3.2 | 3.5 | V | I _F =20mA | |
| Reverse Current | I _R | | | 100 | μA | V _R =5V | |
| Luminous Intensity Matching Rate | I _v -m | | | 2.0:1 | | I _F =20mA | |